

- Heavy Duty Brass Manifold
- Solid Ceramic Plungers
- Stainless Steel Plunger Rods and Check Valves
- Replaceable PTFE Coated Body Guides
- Heavy Duty Bronze Connecting Rods with Guide Pins for Perfect Cap Alignment.
- Heavy Duty Flat Base High Pressure Seals
- Dual Roller Bearings
- 118 oz. Oil Capacity
- 1" BSP-F Inlet. 1/2" BSP-F Outlet
- Max Fluid Temp, 160°F




Scan this QR Code for more information

PENTA Series Plunger Pumps 35 mm Solid Keyed Shaft

	Model	GPM	l/min	PSI	bar	Power Req.	Seal Kit	Valve Kit	Weight
1000 RPM	PENTA-B 25/400 R	6.6	25.0	5800	400	25.6 EBHP	6061.81 (Kit 9P)	6061.79 (Kit 63P)	97 lbs
	PENTA-B 30/300 R	7.9	30.0	4350	300	23.1 EBHP	6061.76 (Kit 10P)	6061.73 (Kit 3P)	97 lbs
	PENTA-B 40/300 R	10.6	40.0	4350	300	30.7 EBHP	6061.76 (Kit 10P)	6061.73 (Kit 3P)	97 lbs
	PENTA-B 50/200 R	12.9	49.0	2900	200	25.1 EBHP	6061.69 (Kit 12P)	6061.73 (Kit 3P)	97 lbs
1450 RPM	PENTA-C 35/400 R	9.2	35.0	5800	400	35.9 EBHP	6061.81 (Kit 9P)	6061.79 (Kit 63P)	97 lbs
	PENTA-C 43/300 R	11.4	43.0	4350	300	33.1 EBHP	6061.76 (Kit 10P)	6061.73 (Kit 3P)	97 lbs
	PENTA-C 58/300 R	15.3	58.0	4350	300	44.6 EBHP	6061.76 (Kit 10P)	6061.73 (Kit 3P)	97 lbs
	PENTA-C 70/200 R	18.8	71.0	2900	200	36.4 EBHP	6061.69 (Kit 12P)	6061.73 (Kit 3P)	97 lbs
1750 RPM	PENTA-D 18.0/40 R	18.2	70.0	4060	280	50.0 EBHP	6061.75 (Kit 11P)	6061.73 (Kit 3P)	97 lbs

NOTE: All pump models available with left-hand drive option. Substitute 'L' for 'R' in model number when ordering (ex. PENTA-C 43/300 L)

Dimensional Drawings

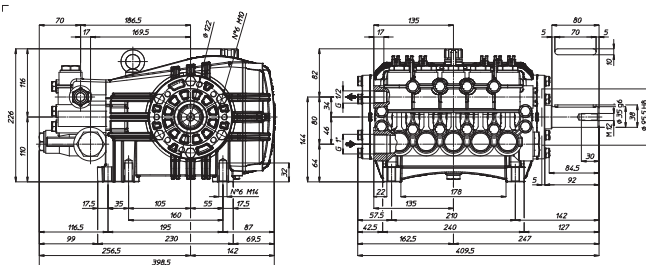

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937