




MYERS® APLEX SERIES

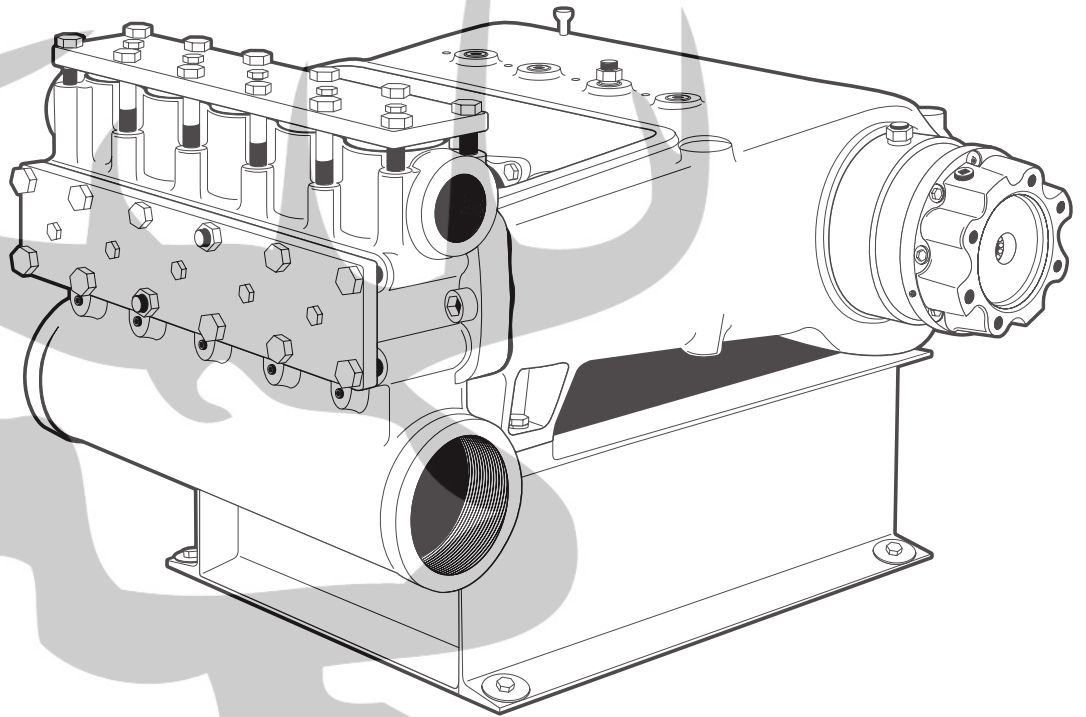

MODELS

MA-45M, MA-75L, MA-75M, MA-75H,
SC-80, SC-80H, SC-115L, SC-115, SC-115H,
RO-72, RO-117

QUINTUPLEX PUMPS

INSTALLATION AND SERVICE MANUAL

NOTE! To the installer: Please make sure you provide this manual to the owner of the equipment or to the responsible party who maintains the system.

Engineering Data

| | |
|--------------|----|
| MA-45M..... | 3 |
| MA-75L..... | 4 |
| MA-75M..... | 5 |
| MA-75H..... | 6 |
| SC-80..... | 7 |
| SC-80H..... | 8 |
| SC-115L..... | 9 |
| SC-115..... | 10 |
| SC-115H..... | 11 |
| RO-72..... | 12 |
| RO-117..... | 13 |

Dimensional Data14-15**Installation, Operation, Lubrication, Maintenance and Storage Instructions..... 16**

| | |
|--|--------|
| Safety..... | 16 |
| Storage..... | 16 |
| Pump Location and Piping Design..... | 16 |
| Suction Piping..... | 16-17 |
| Acceleration Head..... | 17 |
| Discharge Piping..... | 17-18 |
| Bypass Piping..... | 18 |
| Lubrication..... | 18 |
| V-Belt Drive..... | 18, 20 |
| Suggested Piping System for Plunger Pumps..... | 19 |
| Direction of Rotation..... | 20 |
| Automatic (Safety) Shutdowns..... | 20 |

Crankshaft Assembly..... 20

| | |
|------------------------------|-------|
| General..... | 20 |
| Tapered Roller Bearings..... | 20-21 |
| Center Bearings..... | 21 |

Installing Crankshaft..... 21

| | |
|---|----|
| General..... | 21 |
| Shim Adjustment of Tapered Roller Bearings..... | 21 |
| Installation of Crankshaft Oil Seal..... | 21 |

Connecting Rod, Crosshead and Crosshead Pin**Assembly..... 21**

| | |
|---|-------|
| General..... | 21-22 |
| Installing Wrist Pin Bushings..... | 22 |
| Pinning the Crosshead..... | 22-23 |
| Order of Assembly..... | 23 |
| Precision Crankpin (Crankthrow) Bearings..... | 23 |

Wiper Box Assembly..... 23

| | |
|----------------------------|-------|
| General..... | 23 |
| “Poly Pak” Seal..... | 23-24 |
| Mechanical Oil Seal..... | 24 |
| Inserting the Plunger..... | 24 |

Stuffing Box, Packing and Plunger Assemblies 24

| | |
|-------------------------------------|-------|
| General..... | 24 |
| Spring Loaded Packing..... | 24-25 |
| Hi/Lo Gland Adjustable Packing..... | 25 |
| Inserting the Plunger..... | 25 |
| Installing the Gland..... | 25 |
| Installing the Liquid End..... | 25-26 |
| Installing the Stuffing Box..... | 26 |
| Connecting the Plunger..... | 26 |
| Packing..... | 26-27 |
| Plungers..... | 27 |
| Converting Plunger to Piston..... | 27 |
| Changing Piston Cups..... | 27 |

Dual-Stem Guided and Disc Valve Systems..... 27

| | |
|--|-------|
| General..... | 27 |
| Disc Valve Construction..... | 28 |
| Setting the Valve Seat..... | 28 |
| Installing the Valve Seat..... | 28 |
| Installing O-Rings, Dual Stem Guided Spring and Cage..... | 28 |
| Installing Disc, Spring, Disc Valves and Stem..... | 28 |
| Pulling the Valve Seat..... | 28-29 |
| Removing the Valve Seat..... | 29 |

Trouble Location and Remedy30-32**Parts Lists.....33-44****Warranty 48**

| MA-45M ENGINEERING DATA | |
|---|------------------------------------|
| Power End | |
| Model Quintuplex Pump | MA-45M |
| Maximum Input HP at Speed | 45 at 600 rpm |
| Rated Continuous Plunger Load | 2,376 lbs |
| Stroke | 2-1/4" |
| Maximum Rated Continuous Speed | 600 rpm |
| Normal Continuous Speed Range | 150 to 550 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 8 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 3-1/4" x 3-5/8" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension | 2.250/2.249" |
| At Tapered Roller Bearings | 3.15" |
| At Center Bearings | 4.91" |
| At Crankpin Bearings, Diameter x Length | 2-1/4" x 1-5/8" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers, 1-7/8" thru 1-1/8" Separate w/ Plungers, 1" thru 3/4" | 316 S.S. 416 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 600 rpm At 450 rpm | 225 fpm 169 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 75,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 1-7/8" thru 3/4" |
| Maximum Continuous Working Pressure | 3,000 psi |
| Hydrostatic Test | 4,500 psi |
| Discharge Connection Size | 1-1/2" NPTF |
| Suction Connection Size | 2 1/2" NPTF |
| Available Liquid End Materials, A.S.T.M.: Nickel Aluminum Bronze Forged Steel Block Ductile Iron | B148-C955 A105 A536 80-55-06 |

| MA-45M ENGINEERING DATA | |
|---|---|
| Liquid End (Continued) | |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 316 S.S. |
| Stuffing Boxes, Field-Removable and Replaceable: Stainless Steel, Hardened Carbon Steel | 17-4PH 1020 |
| Packing Types Available: Gland-loaded, Non-Adjustable Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar Spring-loaded, Garlock | Style 838 Style 120X Style 140/141 Style 892IK |
| Valve Cover and Cylinder Head Plugs | 416 S.S. or 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Acetal Resin Optional, Hardened and Lapped Double Stem-Guided | Delrin 17-4PH S.S. 17-4PH S.S. |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) Double Stem-Guided Valve | 1.400 sq. in. 0.958 sq. in. |
| Average Liquid Velocity with 1-7/8" plungers & plate valves: At 600 crankshaft rpm At 450 crankshaft rpm | 7.40 fps 5.55 fps |
| Average Liquid Velocity with 1-7/8" plungers & double stem valves: At 600 crankshaft rpm At 450 crankshaft rpm | 10.81 fps 8.11 fps |
| Average Liquid Velocity, 1-7/8" plungers at 600 rpm: Suction Manifold Discharge Manifold | 5.40 fps 14.65 fps |
| General | |
| Overall Dimensions: Length Width Height | 31-3/4" 29" 12-3/8" |
| Approximate Weights: With Aluminum Bronze Liquid End With Ductile Iron Liquid End With Forged Steel Liquid End | 710 lbs 690 lbs 720 lbs |

| MA-75L ENGINEERING DATA | |
|--|--|
| Power End | |
| Model Quintuplex Pump | MA-75L |
| Maximum Input HP at Speed | 75 at 550 rpm |
| Rated Continuous Plunger Load | 3,535 lbs |
| Stroke | 2-3/4" |
| Maximum Rated Continuous Speed | 550 rpm |
| Normal Continuous Speed Range | 150 to 450 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 12 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 4" x 4-1/2" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension At Tapered Roller Bearings At Crankpin Bearings, Diameter x Length | 2.750/2.749" 3.35" 2-3/4" x 2" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Wrist Pin Bushing, SAE 660, Diameter x Width | 1-5/16" x 2" |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers | 316 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 550 rpm | 252 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 75,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 2-1/4" Thru 2-3/4" |
| Maximum Continuous Working Pressure | 889 psi |
| Hydrostatic Test | 1,300 psi |
| Discharge Connection Size | 2-1/2" NPTF |
| Suction Connection Size | 5" NPTF |
| Available Liquid End Materials, A.S.T.M.: Carbon Steel Block Ductile Iron Stainless Steel | A36 or A516 A536 80-55-06 Various Grades |
| Plunger Type Rokide Stainless Steel, Chromium Oxide-Coated | 316 S.S. |
| Stuffing Boxes, Field-Removable and Replaceable: Stainless Steel, Hardened Carbon Steel | 17-4PH 1020 |

| MA-75L ENGINEERING DATA | |
|---|---|
| Liquid End (Continued) | |
| Packing Types Available: Gland-loaded, Non-Adjustable Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar Spring-loaded, Garlock | Style 838 Style 120X Style 140/141 Style 892IK |
| Valve Cover and Cylinder Head Plugs | 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Acetal Resin Optional, Hardened and Lapped Dual Stem-Guided | Delrin 17-4PH S.S. 17-4PH S.S. |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) Double Stem-Guided Valve | 2.4 sq. in. 2.3 sq. in. |
| Average Liquid Velocity thru Seat with 2-3/4" plungers & plate valves: At 550 crankshaft rpm | 10.8 fps |
| Average Liquid Velocity thru Seat with 2-3/4" plungers & dual stem valves: At 550 crankshaft rpm | 9.7 fps |
| Average Liquid Velocity, 2-3/4" plungers at 550 rpm: Suction Manifold Discharge Manifold | 2.3 fps 12.5 fps |
| General | |
| Overall Dimensions: Length Width Height | 37-5/16" 37-3/4" 14-3/4" |
| Approximate Weights: With Ductile Iron Liquid End With Forged Steel Liquid End | 1,435 lbs 1,675 lbs |

| MA-75M ENGINEERING DATA | |
|--|--|
| Power End | |
| Model Quintuplex Pump | MA-75M |
| Maximum Input HP at Speed | 75 at 550 rpm |
| Rated Continuous Plunger Load | 3,535 lbs |
| Stroke | 2-3/4" |
| Maximum Rated Continuous Speed | 550 rpm |
| Normal Continuous Speed Range | 150 to 450 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 12 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 4" x 4-1/2" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension At Tapered Roller Bearings At Crankpin Bearings, Diameter x Length | 2.750/2.749" 3.35" 2-3/4" x 2" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Wrist Pin Bushing, SAE 660, Diameter x Width | 1-5/16" x 2" |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers, 2-1/4" thru 1-3/8" Separate w/ Plungers, 1-1/4" thru 3/4" | 416 S.S. 416 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 550 rpm | 252 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 75,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 2-1/4" Thru 3/4" |
| Maximum Continuous Working Pressure | 3,000 psi |
| Hydrostatic Test | 4,500 psi |
| Discharge Connection Size | 2" NPTF |
| Suction Connection Size | 3" NPTF |
| Available Liquid End Materials, A.S.T.M.: Nickel Aluminum Bronze Forged Steel Block Ductile Iron Stainless Steel | B148-C955 A105 A536 80-55-06 Various Grades |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 416 S.S. |

| MA-75M ENGINEERING DATA | |
|---|---|
| Liquid End (Continued) | |
| Stuffing Boxes, Field-Removable and Replaceable: Stainless Steel, Hardened Carbon Steel | 17-4PH 1020 |
| Packing Types Available: Gland-loaded, Non-Adjustable Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar Spring-loaded, Garlock | Style 838 Style 120X Style 140/141 Style 892IK |
| Valve Cover and Cylinder Head Plugs | 416 S.S. or 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Acetal Resin Optional, Hardened and Lapped Double Stem-Guided | Delrin 17-4PH S.S. 17-4PH S.S. |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) Double Stem-Guided Valve | 2.3 sq. in. 1.5 sq. in. |
| Average Liquid Velocity thru Seat with 2-1/4" plungers & plate valves: At 550 crankshaft rpm At 350 crankshaft rpm | 7.5 fps 4.8 fps |
| Average Liquid Velocity thru Seat with 2-1/4" plungers & double stem valves: At 550 crankshaft rpm At 350 crankshaft rpm | 11.2 fps 7.1 fps |
| Average Liquid Velocity, 2-1/4" plungers at 550 rpm: Suction Manifold Discharge Manifold | 4.7 fps 10.3 fps |
| General | |
| Overall Dimensions: Length Width Height | 36-1/4" 37-3/4" 14-3/4" |
| Approximate Weights: With Aluminum Bronze Liquid End With Ductile Iron Liquid End With Forged Steel Liquid End | 1,270 lbs 1,240 lbs 1,375 lbs |

| MA-75H ENGINEERING DATA | |
|--|--------------------------------------|
| Power End | |
| Model Quintuplex Pump | MA-75H |
| Maximum Input HP at Speed | 75 at 550 rpm |
| Rated Continuous Plunger Load | 3,535 lbs |
| Stroke | 2-3/4" |
| Maximum Rated Continuous Speed | 550 rpm |
| Normal Continuous Speed Range | 150 to 450 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 12 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 4" x 4-1/2" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension At Tapered Roller Bearings At Crankpin Bearings, Diameter x Length | 2.750/2.749" 3.35" 2-3/4" x 2" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Wrist Pin Bushing, SAE 660, Diameter x Width | 1-5/16" x 2" |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Separate w/ Plungers, 1-1/4" thru 3/4" | 416 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 550 rpm | 252 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 75,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 7/8" Thru 1-1/8" |
| Maximum Continuous Working Pressure | 5,000 psi |
| Hydrostatic Test | 7,500 psi |
| Discharge Connection Size | 1-12" NPTF |
| Suction Connection Size | 2" NPTF |
| Available Liquid End Materials, A.S.T.M.: Forged Steel Forged Stainless Steel | A105 2205 |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 316 S.S. |
| Stuffing Boxes, Field-Removable and Replaceable: Carbon Steel | 1020 |
| Packing Types Available: Spring-loaded, Braided Teflon & Kevlar | Style 140/141 |

| MA-75H ENGINEERING DATA | |
|--|-------------------------------|
| Liquid End (Continued) | |
| Valve Cover and Cylinder Head Plugs | 1020 or 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Hardened and Lapped Abrasion Resistant | 17-4PH S.S. 17-4PH S.S. |
| Valve Spring Material | Inconel |
| Valve Seat, Liquid Passage Areas: Disc Valves Abrasion Resistant | 1.4 sq. in. 1 sq. in. |
| Average Liquid Velocity thru Seat with 1" plungers & disc valves: At 550 crankshaft rpm At 350 crankshaft rpm | 2.3 fps 1.4 fps |
| Average Liquid Velocity thru Seat with 1" plungers & abrasion resistant valves: At 550 crankshaft rpm At 350 crankshaft rpm | 3.4 fps 2.2 fps |
| Average Liquid Velocity with 1" plungers at 550 rpm: Thru Suction Manifold Thru Discharge Manifold | 2.1 fps 3.55 fps |
| General | |
| Overall Dimensions: Length Width Height | 36-1/4" 37-3/4" 14-3/4" |
| Approximate Weights: With Block Liquid End | 1,240 lbs |

| SC-80 ENGINEERING DATA | |
|--|---|
| Power End | |
| Model Quintuplex Pump | SC-80 |
| Maximum Input HP at Speed | 100 at 600 rpm |
| Rated Continuous Plunger Load | 5,280 lbs |
| Stroke | 2-1/4" |
| Maximum Rated Continuous Speed | 600 rpm |
| Normal Continuous Speed Range | 250 to 600 rpm |
| Minimum Speed | 50 rpm |
| Oil Capacity | 8 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 3-1/4" x 3-5/8" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension At Tapered Roller Bearings At Center Bearings At Crankpin Bearings, Diameter x Length | 2.250/2.249" 3.15" 4.91" 2-1/4" x 1-5/8" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers, 1-7/8" thru 1-1/2" sizes | 316 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 600 rpm At 450 rpm | 225 fpm 169 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 30,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 1-7/8" Thru 1-1/2" |
| Maximum Continuous Working Pressure | 3,500 psi |
| Hydrostatic Test | 5,250 psi |
| Discharge Connection Size | 1-1/2" NPTF |
| Suction Connection Size | 2-1/2" NPTF |
| Available Liquid End Materials, A.S.T.M.: Ductile Iron | A536 80-55-06 |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 316 S.S. |
| Stuffing Boxes, Field-Removable and Replaceable: Carbon Steel | 1020 |

| SC-80 ENGINEERING DATA | |
|---|---|
| Liquid End (Continued) | |
| Packing Types Available: Gland-loaded, Non-Adjustable Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar Spring-loaded, Garlock | Style 838 Style 120X Style 140/141 Style 892IK |
| Valve Cover and Cylinder Head Plugs | 416 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A36 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Acetal Resin Optional, Hardened and Lapped Double Stem-Guided | Delrin 17-4PH S.S. 17-4PH S.S. |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) Double Stem-Guided Valve | 1.400 sq. in. 0.958 sq. in. |
| Average Liquid Velocity with 1-7/8" plungers & plate valves: At 600 crankshaft rpm At 450 crankshaft rpm | 7.40 fps 5.55 fps |
| Average Liquid Velocity with 1-7/8" plungers & double stem valves: At 600 crankshaft rpm At 450 crankshaft rpm | 10.81 fps 8.11 fps |
| Average Liquid Velocity, 1-7/8" plungers at 600 rpm: Thru Suction Manifold Thru Discharge Manifold | 5.40 fps 14.65 fps |
| General | |
| Overall Dimensions: Length Width Height | 31-3/4" 27-3/8" 13-1/8" |
| Approximate Weights | 510 lbs |

| SC-80H ENGINEERING DATA | |
|--|--|
| Power End | |
| Model Quintuplex Pump | SC-80H |
| Maximum Input HP at Speed | 100 at 600 rpm |
| Rated Continuous Plunger Load | 5,280 lbs |
| Stroke | 2-1/4" |
| Maximum Rated Continuous Speed | 600 rpm |
| Normal Continuous Speed Range | 250 to 600 rpm |
| Minimum Speed | 50 rpm |
| Oil Capacity | 7 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 3-1/4" x 3-5/8" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension At Tapered Roller Bearings At Crankpin Bearings, Diameter x Length | 2.250/2.251" 3.15" 2-1/4" x 1-5/8" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings (2) | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod | 17-4 PH S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 600 rpm At 450 rpm | 225 fpm 169 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 15,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 1-3/8" Thru 1-1/8" |
| Maximum Continuous Working Pressure | 5,000 psi |
| Hydrostatic Test | 7,500 psi |
| Discharge Connection Size | 1" NPTF |
| Suction Connection Size | 1-1/2" NPTF |
| Available Liquid End Materials, A.S.T.M.: Alloy Steel Stainless Steel | 4140 15-5 PH |
| Plunger Type Stainless Steel: Chromium Oxide-Coated | 316 S.S. |
| Stuffing Boxes, Field-Removable and Replaceable: Carbon Steel | 1040 |

| SC-80H ENGINEERING DATA | |
|---|--------------------------------|
| Liquid End (Continued) | |
| Packing Types Available: Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar | Style 120X Style 140 |
| Valve Cover and Cylinder Head Plugs | 410 S.S. |
| Retainer Plates, Steel, A.S.T.M. | A36 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Disc Abrasion Resistant | 17-4PH S.S. 17-4PH S.S. |
| Valve Seat, Liquid Passage Areas: Suction Discharge | 0.573 sq. in. 0.958 sq. in. |
| Average Liquid Velocity with 1-3/8" plungers: At 600 crankshaft rpm | 5.81 fps |
| Average Liquid Velocity at 600 rpm: Thru Suction Manifold Thru Discharge Manifold | 4.73 fps 10.64 fps |
| General | |
| Overall Dimensions: Length Width Height | 31-3/4" 18-5/8" 12-3/8" |
| Approximate Weights: With Steel Liquid End | 475 lbs |

| SC-115L ENGINEERING DATA | |
|---|--------------------------------|
| Power End | |
| Model Quintuplex Pump | SC-115L |
| Maximum Input HP at Speed | 154 at 550 rpm |
| Rated Continuous Plunger Load | 7,216 lbs |
| Stroke | 2-3/4" |
| Maximum Rated Continuous Speed | 550 rpm |
| Normal Continuous Speed Range | 150 to 450 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 12 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 4" x 4-1/2" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension | 2.750/2.749" |
| At Tapered Roller Bearings | 3.35" |
| At Crankpin Bearings, Diameter x Length | 2-3/4" x 2" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Wrist Pin Bushing, SAE 660, Diameter x Width | 1-5/16" x 2" |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers, 2-3/4" thru 2-1/4" sizes | 416 S.S. |
| Separate w/ Plungers, 1-1/4" thru 3/4" | 416 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 550 rpm | 252 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 40,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 2-3/4" Thru 2-1/4" |
| Maximum Continuous Working Pressure | 1,815 psi |
| Hydrostatic Test | 2,700 psi |
| Discharge Connection Size | 2-1/2" NPTF |
| Suction Connection Size | 5" NPTF |
| Available Liquid End Materials, A.S.T.M.: Ductile Iron | ASTM A536 80-55-06 |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 416 S.S. |

| SC-115L ENGINEERING DATA | |
|---|---|
| Liquid End (Continued) | |
| Stuffing Boxes, Field-Removable and Replaceable: Carbon Steel | 1020 |
| Piston Liner Material | Chrome Oxide on 4140 |
| Packing Types Available: Gland-loaded, Non-Adjustable Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar | Style 838 Style 120X Style 140/141 |
| Piston Cup Material | HSN and Kevlar |
| Valve Cover and Cylinder Head Plugs | 416 or 316 S.S. |
| Retainer Plates, Carbon Steel | A36 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Abrasion Resistant Optional, Hardened and Lapped Double Stem-Guided | Wing Guided 17-4PH S.S. 17-4PH S.S. |
| Valve Spring Material | Inconel |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) Double Stem-Guided Valve | 2.3 sq. in. 2.4 sq. in. |
| Average Liquid Velocity thru Seat with 2-3/4" plungers & plate valves: At 550 crankshaft rpm At 350 crankshaft rpm | 11.1 fps 7.1 fps |
| Average Liquid Velocity thru Seat with 2-3/4" plungers & double stem valves: At 550 crankshaft rpm At 350 crankshaft rpm | 10.7 fps 6.8 fps |
| Average Liquid Velocity with 2-3/4" plungers at 550 rpm: Thru Suction Manifold Thru Discharge Manifold | 3.1 fps 14.7 fps |
| General | |
| Overall Dimensions: Length Width Height | 43-1/8" 37-1/4" 15-1/4" |
| Approximate Weights: With Carbon Steel Liquid End With Cast Ductile Iron Liquid End | 1,520 lbs 1,450 lbs |

| SC-115 ENGINEERING DATA | |
|---|--------------------------------|
| Power End | |
| Model Quintuplex Pump | SC-115 |
| Maximum Input HP at Speed | 154 at 550 rpm |
| Rated Continuous Plunger Load | 7,216 lbs |
| Stroke | 2-3/4" |
| Maximum Rated Continuous Speed | 550 rpm |
| Normal Continuous Speed Range | 150 to 450 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 15 U.S. quarts |
| Viscosity, S.S.U.at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 4" x 4-1/2" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension | 2.750/2.749" |
| At Tapered Roller Bearings | 3.35" |
| At Crankpin Bearings, Diameter x Length | 2-3/4" x 2" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Wrist Pin Bushing, SAE 660, Diameter x Width | 1-5/16" x 2" |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers, 2-1/4" thru 1-3/4" sizes Separate w/ Plungers, 1-1/4" thru 3/4" | 416 S.S. 416 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 550 rpm | 252 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 40,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 2-1/4" Thru 1-3/4" |
| Maximum Continuous Working Pressure | 3,500 psi |
| Hydrostatic Test | 5,250 psi |
| Discharge Connection Size | 2" NPTF |
| Suction Connection Size | 3" NPTF |
| Available Liquid End Materials, A.S.T.M.: Ductile Iron | A536 80-55-06 |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 416 S.S. |

| SC-115 ENGINEERING DATA | |
|---|---|
| Liquid End (Continued) | |
| Stuffing Boxes, Field-Removable and Replaceable: Carbon Steel | 1020 |
| Packing Types Available: Gland-loaded, Non-Adjustable Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar Spring-loaded, Garlock | Style 838 Style 120X Style 140/141 Style 892IK |
| Valve Cover and Cylinder Head Plugs | 416 or 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Acetal Resin Optional, Hardened and Lapped Double Stem-Guided | Delrin 17-4PH S.S. 17-4PH S.S. |
| Valve Spring Material | Inconel |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) Double Stem-Guided Valve | 2.3 sq. in. 1.5 sq. in. |
| Average Liquid Velocity thru Seat with 2-1/4" plungers & plate valves: At 550 crankshaft rpm At 350 crankshaft rpm | 7.5 fps 4.8 fps |
| Average Liquid Velocity thru Seat with 2-1/4" plungers & double stem valves: At 550 crankshaft rpm At 350 crankshaft rpm | 11.2 fps 7.1 fps |
| Average Liquid Velocity with 2-1/4" plungers at 550 rpm: Thru Suction Manifold Thru Discharge Manifold | 5.6 fps 14.2 fps |
| General | |
| Overall Dimensions: Length Width Height | 36-1/4" 37-3/4" 14-3/4" |
| Approximate Weights: With Ductile Iron Liquid End | 1,240 lbs |

| SC-115H ENGINEERING DATA | |
|---|--------------------------------|
| Power End | |
| Model Quintuplex Pump | SC-115H |
| Maximum Input HP at Speed | 154 at 550 rpm |
| Rated Continuous Plunger Load | 7,216 lbs |
| Stroke | 2-3/4" |
| Maximum Rated Continuous Speed | 550 rpm |
| Normal Continuous Speed Range | 150 to 450 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 12 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 4" x 4-1/2" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension | 2.750/2.749" |
| At Tapered Roller Bearings | 3.35" |
| At Crankpin Bearings, Diameter x Length | 2-3/4" x 2" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Wrist Pin Bushing, SAE 660, Diameter x Width | 1-5/16" x 2" |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers, 2-1/4" thru 1-3/4" sizes Separate w/ Plungers, 1-1/4" thru 3/4" | 416 S.S. 416 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 550 rpm | 252 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 40,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 1-5/8" Thru 1-1/4" |
| Maximum Continuous Working Pressure | 5,878 psi |
| Hydrostatic Test | 8,800 psi |
| Discharge Connection Size | 2" NPTF |
| Suction Connection Size | 3" NPTF |
| Available Liquid End Materials, A.S.T.M.: | |
| Alloy Steel | 4140 |
| Stainless Steel | 2205 |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 416 S.S. |

| SC-115H ENGINEERING DATA | |
|---|-------------------------------|
| Liquid End (Continued) | |
| Stuffing Boxes, Field-Removable and Replaceable: Carbon Steel | 1020 |
| Packing Types Available: Spring-loaded, Cup-Type Spring-loaded, Braided Teflon & Kevlar | Style 120X Style 140/141 |
| Valve Cover and Cylinder Head Plugs | 416 or 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Hardened and Lapped Abrasion Resistant | 17-4PH S.S. 17-4PH S.S. |
| Valve Spring Material | Inconel |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) Double Stem-Guided Valve | 1.4 sq. in. 1 sq. in. |
| Average Liquid Velocity thru Seat with 1-5/8" plungers & plate valves: At 550 crankshaft rpm At 350 crankshaft rpm | 6.4 fps 3.79 fps |
| Average Liquid Velocity thru Seat with 1-5/8" plungers & double stem valves: At 550 crankshaft rpm At 350 crankshaft rpm | 9.5 fps 5.5 fps |
| Average Liquid Velocity with 1-5/8" plungers at 550 rpm: Thru Suction Manifold Thru Discharge Manifold | 2.9 fps 7.4 fps |
| General | |
| Overall Dimensions: Length Width Height | 36-1/4" 37-3/4" 14-3/4" |
| Approximate Weights: With Steel Iron Liquid End | 1,240 lbs |


| RO-72 ENGINEERING DATA | |
|--|---|
| Power End | |
| Model Quintuplex Pump | RO-72 |
| Maximum Input HP at Speed | 55 at 600 rpm |
| Rated Continuous Plunger Load | 2,902 lbs |
| Stroke | 2-1/4" |
| Maximum Rated Continuous Speed | 600 rpm |
| Normal Continuous Speed Range | 350 to 550 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 8 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron |
| Crosshead, Full Cylindrical | Cast Iron |
| Crosshead, Diameter x Length | 3-1/4" x 3-5/8" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension At Tapered Roller Bearings At Center Bearings At Crankpin Bearings, Diameter x Length | 2.250/2.249" 3.15" 4.91" 2-1/4" x 1-5/8" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers | 316 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 600 rpm At 450 rpm | 225 fpm 169 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 75,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 1-7/8" Thru 7/8" |
| Maximum Continuous Working Pressure | 2,369 psi |
| Hydrostatic Test | 3,750 psi |
| Discharge Connection Size | 1-1/2" NPTF |
| Suction Connection Size | 2-1/2" NPTF |
| Available Liquid End Materials, A.S.T.M.: | |
| Nickel Aluminum Bronze | B148-C955 |
| Stainless Steel Block | 2205 Duplex S.S. |
| Stainless Steel Block | 316 S.S. |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 316 S.S. |

| RO-72 ENGINEERING DATA | |
|--|---------------------------|
| Liquid End (Continued) | |
| Stuffing Boxes, Field-Removable and Replaceable | Stainless Steel |
| Gland, Stuffing Box | Nickel Aluminum Bronze |
| Packing Types Available: Spring-loaded, Cup-Type Spring-loaded, Garlock | Style 120X Style 892IK |
| Valve Cover and Cylinder Head Plugs | 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Acetal Resin Optional, Hardened and Lapped | Delrin Stainless Steel |
| Valve Spring Material | Inconel |
| Valve Seat, Liquid Passage Areas | 1.4 sq. in. |
| Average Liquid Velocity thru Seat, with 1-7/8" plungers: At 600 crankshaft rpm At 450 crankshaft rpm | 7.4 fps 5.5 fps |
| Average Liquid Velocity, 1-7/8" plungers at 600 rpm: Thru Suction Manifold Thru Discharge Manifold | 5.4 fps 14.6 fps |
| General | |
| Overall Dimensions: | |
| Length | 31-3/4" |
| Width | 29" |
| Height | 12-3/8" |
| Approximate Weights: | |
| With Aluminum Bronze Liquid End | 710 lbs |
| With Stainless Steel Liquid End | 750 lbs |

| RO-117 ENGINEERING DATA | |
|---|--------------------------------|
| Power End | |
| Model Quintuplex Pump | RO-117 |
| Maximum Input HP at Speed | 85 at 550 rpm |
| Rated Continuous Plunger Load | 4,006 lbs |
| Stroke | 2-3/4" |
| Maximum Rated Continuous Speed | 550 rpm |
| Normal Continuous Speed Range | 350 to 500 rpm |
| Minimum Speed | 100 rpm |
| Oil Capacity | 12 U.S. quarts |
| Viscosity, S.S.U. at 210°F | 70 to 84 |
| Power End Oiling System | Splash & Scoop |
| Power Frame, One-Piece | Cast Iron, Class 30 |
| Crosshead, Full Cylindrical | Cast Iron, Class 30 |
| Crosshead, Diameter x Length | 4" x 4-1/2" |
| Crankshaft | Ductile Iron |
| Crankshaft Diameters: At Drive Extension | 2.750/2.749" |
| At Tapered Roller Bearings | 3.35" |
| At Crankpin Bearings, Diameter x Length | 2-3/4" x 2" |
| Crosshead (Wrist) Pin, Case-Hardened and Ground | AISI 8620 |
| Wrist Pin Bushing, SAE 660, Diameter x Width | 1-5/16" x 2" |
| Main Bearings, Tapered Roller | Timken |
| Center Bearings, Two, Precision | Steel Backed, Babbitt-Lined |
| Crankpin Bearings, Precision Automotive | Steel Backed, Babbitt-Lined |
| Extension (Pony) Rod: Integral w/ Plungers | 316 S.S. |
| Connecting Rod, Automotive Type | Ductile Iron |
| Average Crosshead Speed: At 550 rpm | 252 fpm |
| Minimum Life Expectancy, Main Bearings, L ₁₀ | 75,000+hr |
| Liquid End | |
| Plunger Size Range, diameter | 2-1/4" Thru 1" |
| Maximum Continuous Working Pressure | 2,697 psi |
| Hydrostatic Test | 4,000 psi |
| Discharge Connection Size | 2" NPTF |
| Suction Connection Size | 3" NPTF |
| Available Liquid End Materials, A.S.T.M.: | |
| Nickel Aluminum Bronze | B148-C955 |
| Stainless Steel Block | 2205 Duplex S.S. |
| Stainless Steel Block | 316 S.S. |
| Plunger Type Rokide Stainless Steel: Chromium Oxide-Coated | 316 S.S. |

| RO-117 ENGINEERING DATA | |
|---|-------------------------------|
| Liquid End (Continued) | |
| Stuffing Boxes, Field-Removable and Replaceable | 316 S.S. |
| Glands (Nuts): Nickel Aluminum Bronze | B148-C955 |
| Packing Types Available: Spring-loaded, Cup-Type Spring-loaded, Garlock | Style 120X Style 892IK |
| Valve Cover and Cylinder Head Plugs | 316 S.S. |
| Retainer Plates, Ductile Iron, A.S.T.M. | A536 80-55-06 |
| Seals, Stuffing Boxes, Valve Covers, Cylinder Heads | Buna-N |
| Bolting, High Strength, Heat Treated | Alloy Steel |
| Available Valve Types: Standard, Acetal Resin Optional, Hardened and Lapped | Delrin 17-4PH S.S. |
| Valve Spring Material | Inconel |
| Valve Seat, Liquid Passage Areas: Plate (Disc) Valves, (Delrin or S.S.) | 2.3 sq. in. |
| Average Liquid Velocity Thru Seat with 2-1/4" plungers: At 550 crankshaft rpm At 350 crankshaft rpm | 7.5 fps 4.8 fps |
| Average Liquid Velocity, 2-1/4" plungers at 550 rpm: Thru Suction Manifold Thru Discharge Manifold | 5.6 fps 14.2 fps |
| General | |
| Overall Dimensions: Length Width Height | 36-1/4" 37-3/4" 14-3/4" |
| Approximate Weights: With Aluminum Bronze Liquid End With Stainless Steel Liquid End | 1,270 lbs 1,375 lbs |



CROSS-SECTION

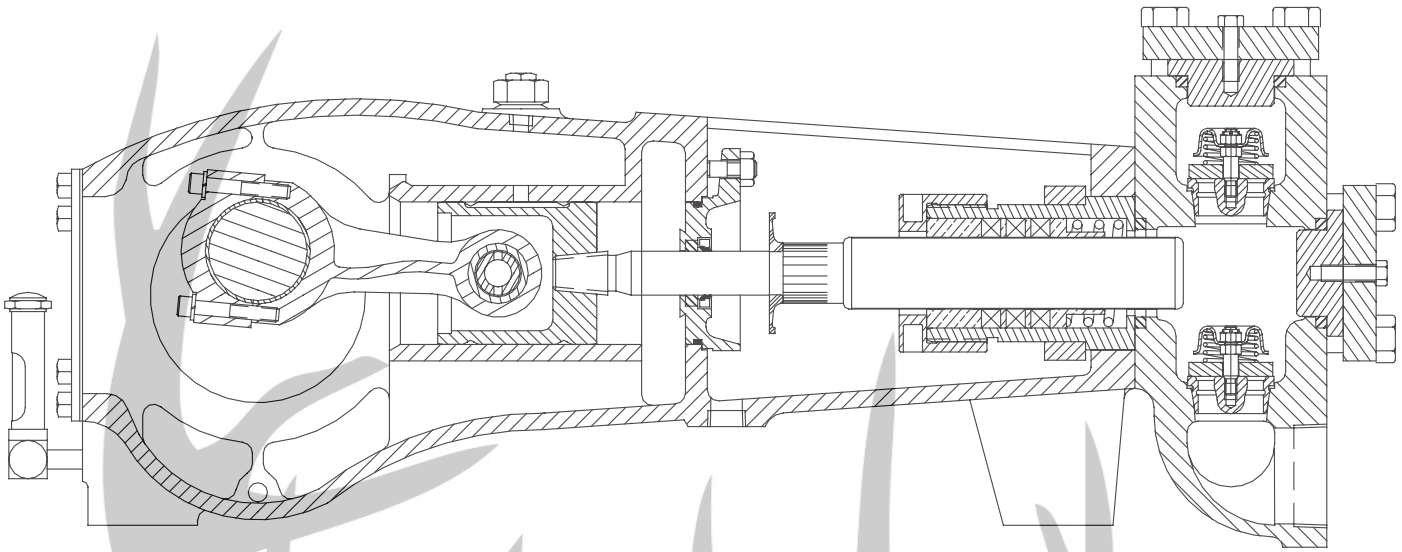



DIMENSIONAL DATA TABLE

| Ref. No. | MA-45M | MA-75L | MA-75M | MA-75H | SC-80 | SC-80H | SC-115 | SC-115L | SC-115H | RO-72 | RO-117 |
|---------------------------|--------------------|---------|----------------|---------|-------------|----------------------|----------|-------------|---------|--------------------|----------------|
| A1 | 13-1/8 | 14-3/8 | 16-3/4 | 16-3/4 | 11-7/16 | 11-3/8 | 14-3/8 | 14-3/8 | 16-3/4 | 13-1/8 | 16-3/4 |
| A2 | 28-3/4 | 35-3/8 | 37-3/4 | 37-3/4 | 27-1/16 | 27 | 35-3/8 | 34-7/8 | 37-3/4 | 28-3/4 | 37-3/4 |
| A3 | 15-5/8 | 21 | 21 | 21 | 15-5/8 | 15-5/8 | 21 | 20-1/2 | 21 | 15-5/8 | 21 |
| B1 | 31-5/8 | 37-5/16 | 36-3/4 | 25-5/8 | 30-5/8 | — | 36-3/4 | 35-1/2 | — | 31-5/8 | 36-3/4 |
| B2 | 22-3/16 | 25-7/8 | 25-5/8 | 6-1/2 | 22-3/16 | — | 25-5/8 | 25-7/8 | 25-5/8 | 22-3/16 | 25-5/8 |
| B3 | 5-1/4 | 6-1/2 | 6-1/2 | — | 5-1/4 | — | 6-1/2 | 6-1/2 | 6-1/2 | 5-1/4 | 6-1/2 |
| B4 | — | 12-1/8 | 14-3/4 | — | 8 | — | 14-3/4 | 12-1/8 | — | — | 14-3/4 |
| B5 | 1 | 5/8 | 3/4 | — | 1 | — | 3/4 | 4 | — | 1 | 3/4 |
| (B) Discharge Connections | 1-1/2" NPTF | — | 2" NPTF | — | 1-1/2" NPTF | — | 2" NPTF | 2-1/2" NPTF | — | 1-1/2" NPTF | 2" NPTF |
| (B) Suction Connections | 2-1/2" NPTF | — | 3" NPTF | — | 2-1/2" NPTF | — | 3" NPTF | 5" NPTF | — | 2-1/2" NPTF | 3" NPTF |
| C1 | 31-3/4 | — | 36-3/4 | — | 31-3/4 | 30-3/4 | 36-3/4 | — | — | 31-3/4 | 36-3/4 |
| C2 | 22-3/16 | — | 25-5/8 | 25-9/16 | 22-3/16 | 22-3/16 | 25-5/8 | — | 25-9/16 | 22-3/16 | 25-5/8 |
| C3 | 5-1/4 | — | 6-1/2 | 6-1/2 | 5-1/4 | 5-1/4 | 6-1/2 | — | 6-1/2 | 5-1/4 | 6-1/2 |
| C4 | 8 | — | 14-1/4 | — | 8 | 12-1/8 | 14-1/4 | — | — | — | 14-1/4 |
| C5 | 1 | — | 5/8 | — | — | 1/8 | 5/8 | — | — | — | 5/8 |
| (C) Discharge Connections | 1-1/2" NPTF | — | 2" NPTF | — | 1-1/2" NPTF | 1-1/2" NPTF | 2" NPTF | — | — | 1-1/2" NPTF | 2" NPTF |
| (C) Suction Connections | 2-1/2" NPTF | — | 3" NPTF | — | 2-1/2" NPTF | 2" NPTF | 3" NPTF | — | — | 2-1/2" NPTF | 3" NPTF |
| D1 | 31-3/4 | — | 36-3/4 | — | — | 32 | — | — | — | 31-3/4 | 36-3/4 |
| D2 | 22-3/16 | — | 25-9/16 | — | — | 22-1/4 | — | — | — | 22-3/16 | 25-9/16 |
| D3 | 5-1/4 | — | 6-1/2 | — | — | 5-1/4 | — | — | — | 5-1/4 | 6-1/2 |
| D4 | 8 | — | 9-1/4 | — | — | 7-3/8 | — | — | — | 8 | 9-1/4 |
| D5 | 1 | — | 1-5/8 | — | — | 1-5/8 | — | — | — | 2-3/4 | 2-1/8 |
| (D) Discharge Connections | 1-1/2" ANSI 600 RF | — | 2" ANSI 600 RF | — | — | 1-1/2" ANSI 2500# RF | — | — | — | 1-1/2" ANSI 600 RF | 2" ANSI 600 RF |
| (D) Suction Connections | 2-1/2" ANSI 150 RF | — | 3" ANSI 150 RF | — | — | 2" ANSI 150# RF | — | — | — | 2-1/2" ANSI 150 RF | 3" ANSI 150 RF |
| E1 | 21-1/2 | — | 24-3/4 | — | 21-1/2 | 21-1/2 | 24-3/4 | 24-3/4 | — | 21-1/2 | 24-3/4 |
| E2 | 3-1/4 | — | 4 | — | 3-1/4 | 3-1/4 | 4 | 4 | — | 3-1/4 | 4 |
| E3 | 8-5/8 | — | 10-3/4 | — | 8-5/8 | 8-5/8 | 10-3/4 | 10-3/4 | — | 8-5/8 | 10-3/4 |
| E4 | 17-1/4 | — | 21-1/2 | — | 17-1/4 | 17-1/4 | 21-1/2 | 21-1/2 | — | 17-1/4 | 21-1/2 |
| E5 | 9/16 | — | 11/16 | — | 9/16 | 9/16 | 11/16 | 11/16 | — | 9/16 | 11/16 |
| E6 | 5/8 | — | 1 | — | 5/8 | 5/8 | 1 | 1 | — | 5/8 | 1 |
| E7 | 2-1/2 | — | 3-1/4 | — | 2-1/2 | 2-1/2 | 3-1/4 | 3-1/4 | — | 2-1/2 | 3-1/4 |
| E8 | 2 TYP. | — | 2 TYP. | — | 2 TYP. | 2 TYP. | 2 TYP. | 2 TYP. | — | 2 TYP. | 2 TYP. |
| E9 | 5/8 TYP. | — | 3/4 TYP. | — | 5/8 TYP. | 5/8 TYP. | 3/4 TYP. | 3/4 TYP. | — | 5/8 TYP. | 3/4 TYP. |
| E10 | 1-1/4 | — | 1-1/2 | — | 1-1/4 | 1-1/4 | 1-1/2 | 1-1/2 | — | 1-1/4 | 1-1/2 |
| E11 | 2-1/2 | — | 3 | — | 2-1/2 | 2-1/2 | 3 | 3 | — | 2-1/2 | 3 |



DIMENSIONAL DRAWINGS

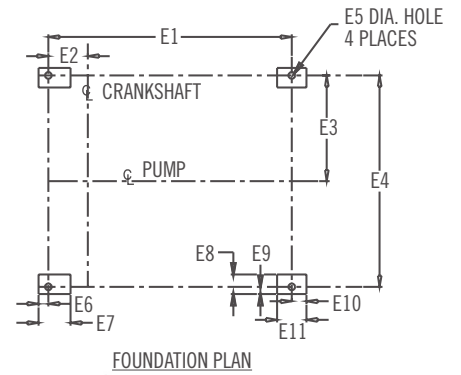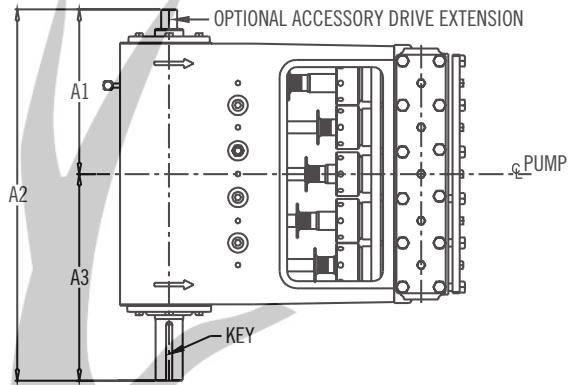



Cast Fluid End

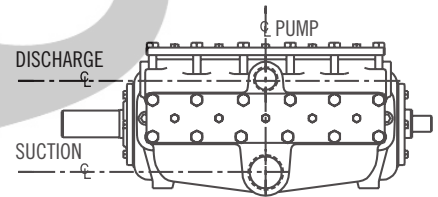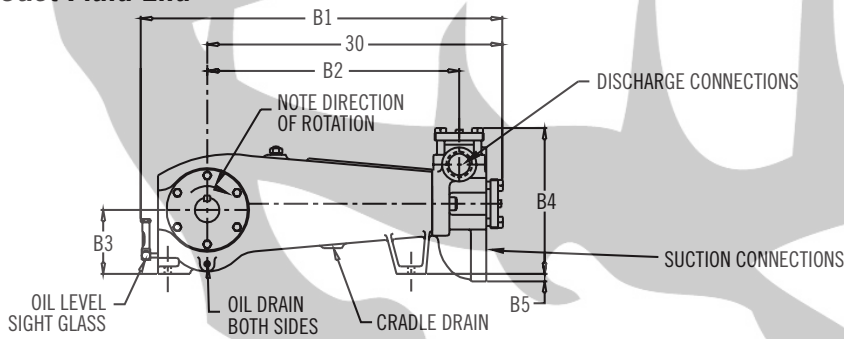

Block Fluid End

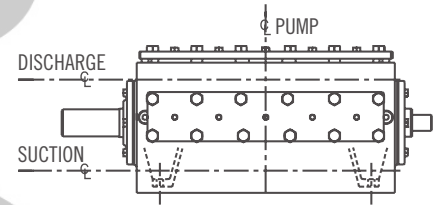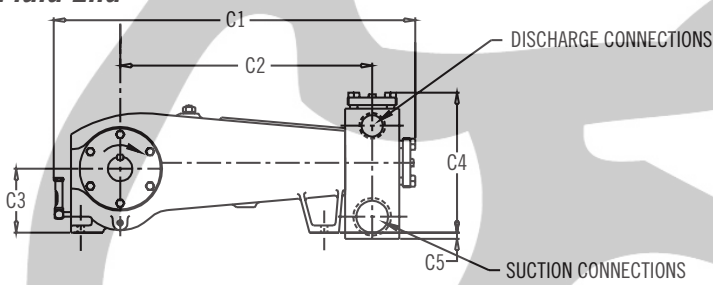

Block Fluid End

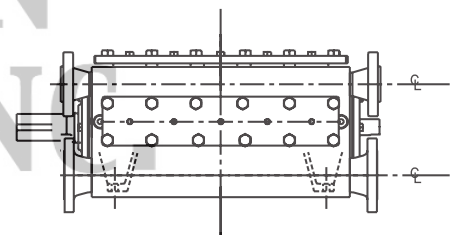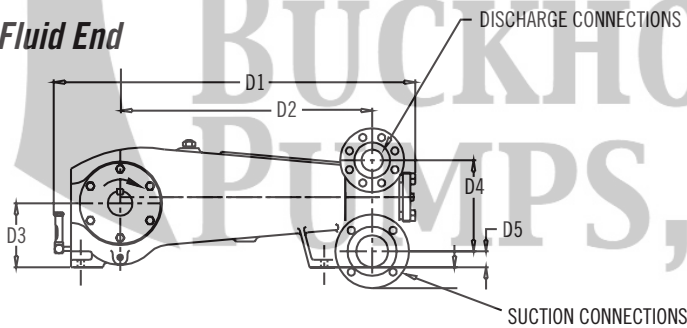

BUCKHORN
PUMPS, INC.

INSTALLATION, OPERATION, LUBRICATION, MAINTENANCE AND STORAGE INSTRUCTIONS

SAFETY

Electrical power or engine must be shut off completely before attempting service on the pump or its drive. Air surrounding the unit to be free of toxic, flammable, or explosive gases.

Tools needed should be planned for in advance (see valve seat pulling instructions) and should be clean and of adequate size. A torque-wrench will be required to tighten connecting rod cap screws.

A properly sized and set relief valve installed in the pump discharge system (ahead of any block valves) is necessary to protect personnel and to avoid dangerous overpressure. The relief valve set pressure should be not more than 25% above the design operating pressure and should discharge to tank or to the atmosphere (toward the ground) and must not be directed back to the pump suction system.

WARNING: *Improper use of this equipment could result in loss of life.*

CALIFORNIA PROPOSITION 65 WARNING:

WARNING: *This product and related accessories contain chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.*

STORAGE

Pumps are shipped dry from the factory. If a pump has been in storage in a humid environment for more than 6 months the crankcase cover should be removed and carefully examined for rust or water collected in the power end. Flush out any evidence of rust or damage which exists, using a light clean oil.

Pumps to be placed in extended storage should be cleaned, repaired as needed and completely filled to the top with clean oil to prevent rusting. Rotate pump monthly 4-1/2 revolutions. Plug all openings to prevent air entry and oil leakage.

Fluid ends must be completely drained of water and suction and discharge ports blanked off. Store pump in a clean, dry location.

PUMP LOCATION AND PIPING DESIGN

Locate pump and driver in a clean, well-drained, ventilated and brightly illuminated area with adequate

working spaces around the pump to provide ample access to fluid end, power end and associated drive elements. Do not expect good maintenance to result if the pump is positioned on muddy terrain or in a dirty, cramped, dimly-lighted area!

The supply tank(s) should be large to allow dissolved air and other gases to escape from the liquid and allow suspended solids to settle out before entering pump. A system employing dams and settling chambers is desirable.

CAUTION: All pumps should be installed level. For mobile applications the maximum angle of intermittent operation pumps (SC pumps) should be no more than 5 degrees in any one direction.

Pumps are not designed to withstand piping weight, vibration and the effects of thermal piping expansion/contraction. Piping loads may be considerable and the weight of all valving, dampeners, filters and associated forces, moments and couples must be completely isolated. Use flexible hoses and rigid piping supports to isolate the pump and its driver from these effects.

SUCTION PIPING

No part of the piping system deserves more careful planning than the suction piping system. Suction piping must be **SHORT, DIRECT and OVERSIZE**. Use one pipe size larger than the pump suction connection. The shorter it is, the better! 1 to 3 feet per second suction velocity is acceptable.

Reference the following table to size a direct suction line from a tank to a pump.

| Suction Piping | | |
|----------------|-----------|---------|
| 2" – 2.5" | 2.5" – 3" | 3" – 4" |
| SC-80H | MA-45M | MA-75M |
| | SC-80 | MA-75H |
| | RO-72 | SC-115 |
| | | SC-115L |
| | | SC-115H |
| | | RO-117 |

Use no elbows, tees, or restricted port valves in this line. Do not install orifice plates or positive displacement type fluid meters in the suction line which act as flow restrictors. Avoid the use of suction filters, if possible. Consider filtering the liquid as it enters the supply tank rather than as it leaves it. The use of an eccentric reducer with the flat side up located at the pump suction connection is recommended. The suction line should slightly rise from tank to pump and loops in which air may collect must be avoided.

The absolute pressure in a suction line may be less than atmospheric pressure and air may be "sucked" into the line unless all flanges and connections are airtight and watertight. If you can see water leaking out

of a suction line when the pump is still, that may mean air is being sucked in when the pump is running.

Suction piping should be buried beneath the frost line or insulated to avoid freezing in the winter. If the suction line has a block valve at the supply tank, a suitable relief valve is suggested to relieve the suction piping from any possible dangerous overpressure from the discharge piping system.

Suction piping is often large, heavy (especially when filled with liquid) and tends to vibrate. Proper solid supports are recommended. A suction hose located near the pump will isolate these effects, protecting the pump from the forces and moments that piping weight creates.

New suction piping systems should be flushed free of pipe scale, welding slag and dirt before starting the pump. Hydrostatic testing to detect air leaks is advisable. Proper choice of suction hose construction is essential to avoid collapse of the hose liner.

Install a dry type compound gage in the suction line near the pumps which should fluctuate evenly. If violently pulsating, this gage indicates that the pump is not fully primed or that one or more valves are inoperative.

ACCELERATION HEAD

A characteristic of all reciprocating pumps is the imperative need to consider the effects of acceleration head which is a **SYSTEM** related phenomenon.

Acceleration head may be considered to be the loss of available hydraulic head (energy) in the piping system occurring because the demand by the pump cylinders for liquid is not smooth and even. Because the pump's demand for liquid is cyclical, the velocity of the liquid in the entire suction system is not truly constant but varies in response to the combined demand of the reciprocating plungers. Thus, liquid in the suction system is compelled to be accelerated and decelerated several times during each crankshaft revolution, depending on the number of plungers. Called "acceleration" head, this loss of available hydraulic head is proportional to:

- (a) The speed (RPM) of the crankshaft
- (b) The average liquid velocity in the piping
- (c) The length of the suction piping
- (d) The number of pumping chambers (triplex, etc.)
- (e) The compressibility of the liquid

Thus, for a given pump, acceleration head effects may be reduced by the use of the shortest possible suction line, sized to reduce liquid velocity to a very low speed. This is often more economical than the use of charge pumps or expensive suction stabilizers.

NOTE: Charge pumps should be sized to 150% of rated pump volume. Charge pumps need to be centrifugals, not a positive displacement pump.

A charging pump is usually not a good substitute for a short, direct, oversize suction line, nor is it a substitute for the computation of available **NPSH**, acceleration head, friction head, vapor pressure and submergence effects duly considered. Required **NPSHR** of Myers Apex Series pumps depends on speed, choice of plunger size and valve spring type. Consult Myers Apex Series Engineering for help with your particular application. A full discussion of suction system losses is given in the Standards of the Hydraulic Institute, 14th Edition.

A common design mistake is the connecting of two (or more) reciprocating pumps to a **COMMON** suction header. This is a profoundly complicated suction system, largely not amenable to mathematical analysis, and is frequently the cause of severe pump pounding, vibration and early valve failures. Each pump should be fed by its own separate, individual piping system, free from the effects of other pump cyclical demands for liquid.

DISCHARGE PIPING

A properly designed discharge piping system usually prevents the need of a pulsation dampener. The most common mistakes made in the design of the discharge piping system are:

1. Pumping directly into a tee or header. A "standing" wave (either audible or sub-audible) then often occurs. If flow must enter a header, use a 45° branch lateral (or equivalent) to avoid a reflecting surface from which sound can reflect.
2. Pumping into short radius 90° elbows. Instead, use two 45° elbows spaced 10 or more pipe diameters apart.
3. Pumping into a right angle choke valve.
4. Pumping into too small piping line size. Piping should be sized to keep fluid velocity below 15 feet per second, max.
5. Pumping through an orifice plate, small venturi, or reduced port "regular opening" valve.
6. Pumping through a quick closing valve, which can cause hydraulic shock (water-hammer).

A good discharge piping system includes:

1. A properly sized, correctly set relief valve. Discharge from relief valve returned to tank (not to pump suction).
2. A full opening discharge gate or ball valve. Avoid restricting plug valves, globe valves and angle valves.

3. A pressure gauge with gage dampener or snubber. Consider a liquid filled gauge. (Scale range to be double the normal pump operating pressure.)

Locate the relief valve and pressure gauge ahead of any block valve and so that the pressure in the pump is always reflected at the relief valve. The relieving capacity of the relief valve must exceed the capacity of the pump to avoid excessive pressure while relieving. Use a full size relief line.

To minimize vibration (whether hydraulic or mechanical), discharge lines should be kept short, direct, well supported and solidly anchored. Avoid “dead” ends and abrupt direction changes.

BYPASS PIPING

Some designers ignore this important aspect of proper design of pump piping systems.

A reciprocating pump, especially after maintenance of the valves or plungers, **STARTS WITH ONE OR MORE FLUID CHAMBERS FULL OF AIR**. Pumps operating on propane, butane, or other volatile liquids **START WITH VAPOR IN THE FLUID CHAMBER(S)**.

Positive displacement pumps do not automatically purge themselves of air and gas after shutdown. For example, a quintuplex plunger pump will, after servicing, expel the air in four of the five pump chambers. Thus, the pressure from four of the “active” cylinders will keep shut the discharge valve of the “inactive”, or “air bound,” cylinder. Then, the air or gas in this cylinder will be compressed and expanded by its reciprocating plunger and never leave the chamber. Similar effects occur in duplex and triplex pumps.

To overcome these difficulties, adequate provision for expelling the gas in the “air bound” cylinders must be present. Common practice is to totally relieve the pump of all discharge pressure during the start-up, after servicing.

Consider the operational advantage of a full-sized bypass line (return to tank) which substantially removes discharge pressure from all cylinders during the start. This requires a block valve on the discharge side and a full opening bypass valve on the other side.

For economy, the bypass (to tank) can be combined with the relief valve discharge line. This line must be full-sized, well supported, and sloped downward to avoid freezing in cold weather. (A frozen relief valve line provides NO protection to either the pump or operating personnel!)

The ability of a reciprocating pump to be “self-priming” depends on the ratio of the swept (displaced) volume in the cylinder to the unswept (clearance) volume at the end of the stroke. This depends on the design of the fluid end and on the plunger size selected.

Choice of the largest size plunger for a particular fluid end improves this compression ratio and so leads to “self priming”, or easy priming. Choice of the minimum size plunger sometimes leads to difficulties, especially with pumps that require frequent servicing, or which handle volatile liquids, or which contain substantial amounts of dissolved air or gas. An automatic bypass and purging system for these applications may be merited.

LUBRICATION

Myers Aplex Series pumps utilize S.A.E. 40 wt. non-detergent oil in the crankcase. This oil requires only a non-foaming additive and should possess good water separation (anti-emulsion) characteristics. Such oils are often labeled “industrial” or “turbine” quality lubricants. If these oils are not available, a good quality gear oil or EP oil may be substituted. See lubrication guidelines.

In temperate climates, oil viscosity selected should fall between 70 and 84 seconds Saybolt viscosimeter at 210° F. In arctic service, low pour point oils are needed.

After the first 500 hours of operation in a new pump, drain the oil. Refill with clean, fresh oil. Thereafter, change the oil every 1,500 hours or sooner if it becomes contaminated with water or dirt. Fill to the center of the sight gage. Recheck after starting, adding oil to center of gage while running.

The table below shows the quarts of oil needed for each pump.

| Quarts of Oil | | |
|---------------|--------|---------|
| 8 | 12 | 15 |
| MA-45M | MA-75L | SC-115 |
| SC-80 | MA-75M | SC-115L |
| SC-80H | MA-75H | SC-115H |
| RO-72 | RO-117 | |


V-BELT DRIVE

A properly designed, well-aligned V-belt will provide years of reliable, economical service if properly tensioned and kept dry, free of oil and ventilated.

Alignment is critical for long life. If the shaft axes are not truly parallel, or if the sheave grooves are not positioned in good alignment, some belts will carry most of the load, resulting in their disproportionate load share and may actually twist or turn over in the groove. Use a straight edge across the rim of the sheaves to detect and correct for misalignment.

After about one week of operation, new V-belts will have stretched somewhat. The motor must be moved on its slide base to re-establish proper belt tensioning.

SUGGESTED PIPING SYSTEM FOR PLUNGER PUMPS

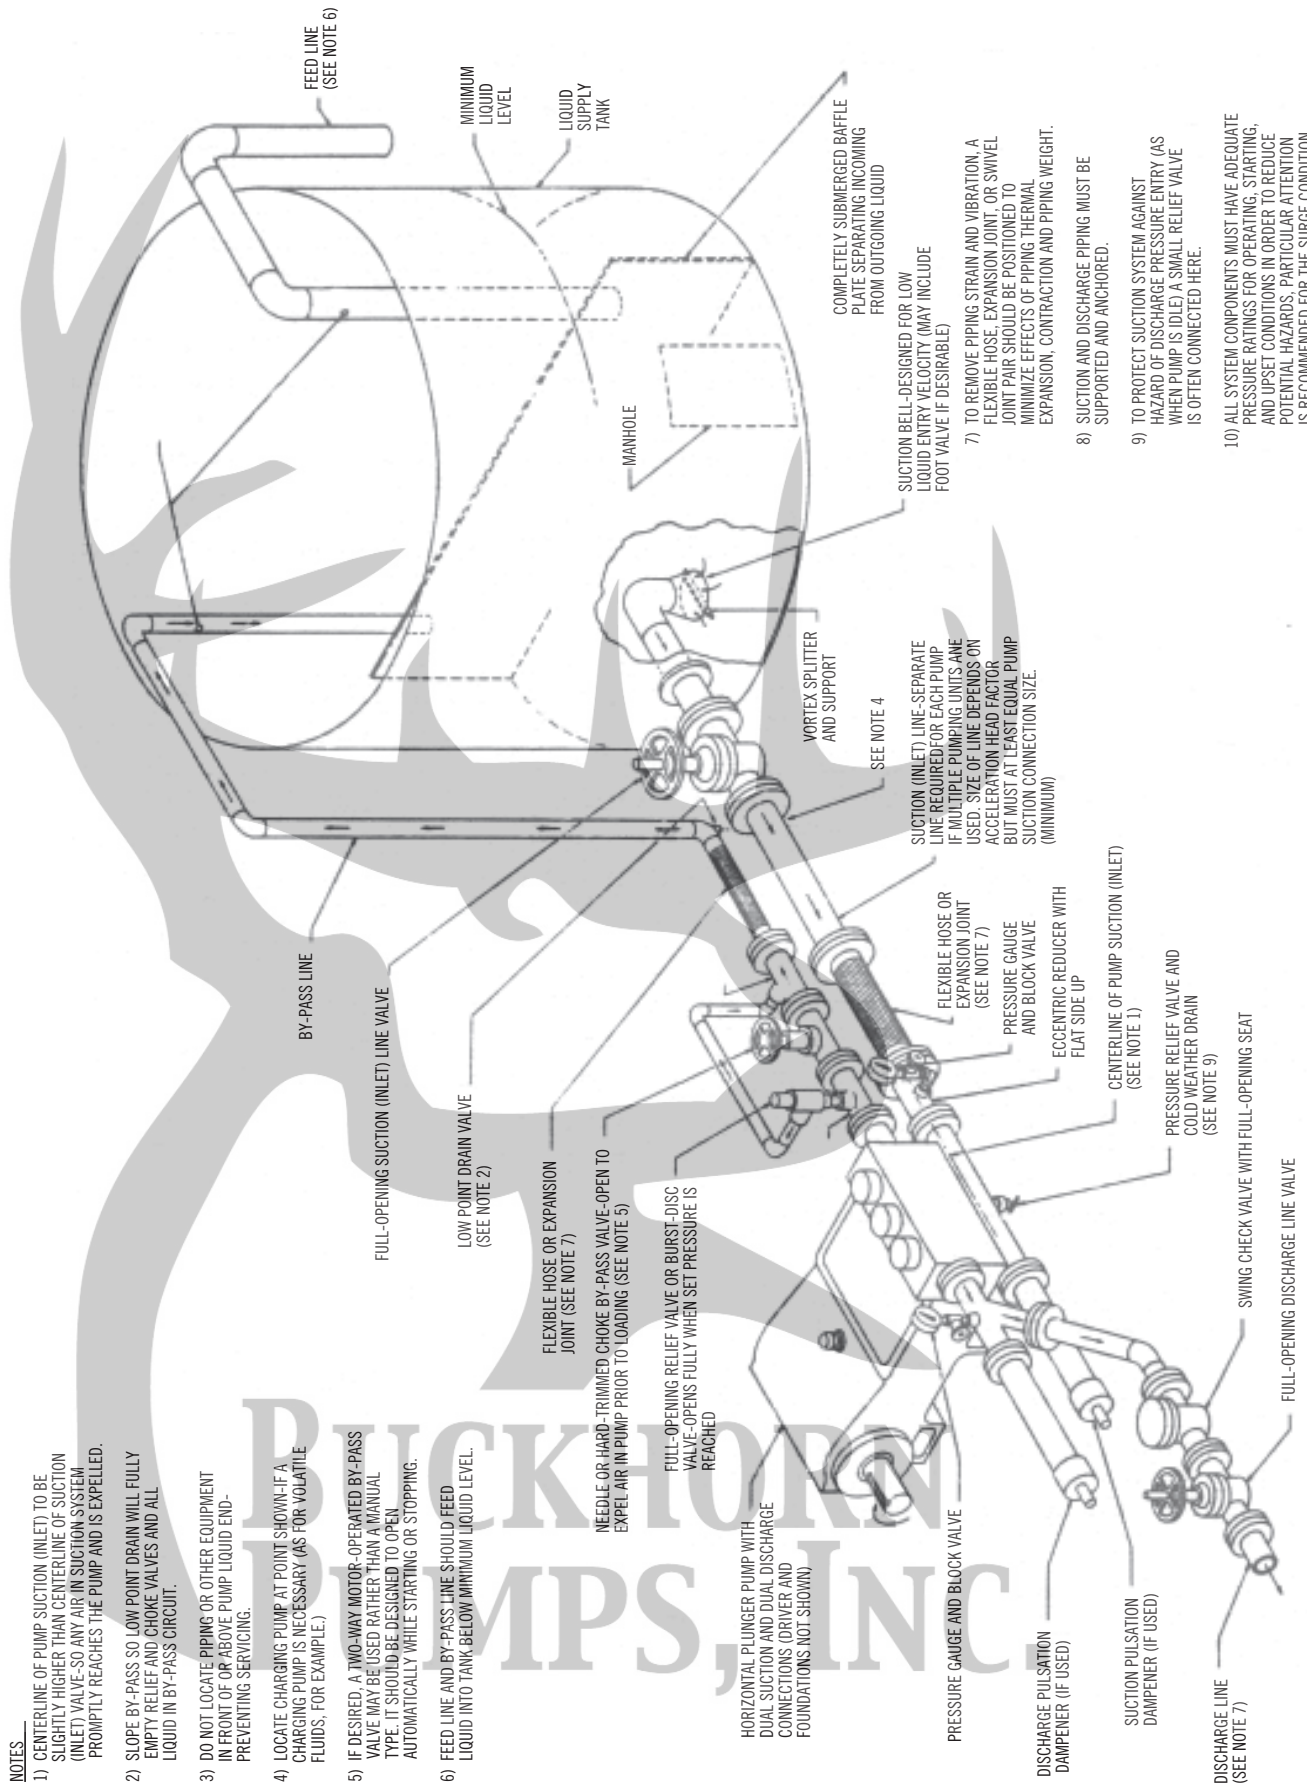

NOTES

- 1) CENTERLINE OF PUMP SUCTION (INLET) TO BE SLIGHTLY HIGHER THAN CENTERLINE OF SUCTION (INLET) VALVE-SO ANY AIR IN SUCTION SYSTEM PROMPTLY REACHES THE PUMP AND IS EXPELLED.
- 2) SLOPE BY-PASS SO LOW POINT DRAIN WILL FULLY EMPTY RELIEF AND CHOKE VALVES AND ALL LIQUID IN BY-PASS CIRCUIT.
- 3) DO NOT LOCATE PIPING OR OTHER EQUIPMENT IN FRONT OF OR ABOVE PUMP LIQUID END- PREVENTING SERVICING.
- 4) LOCATE CHARGING PUMP AT POINT SHOWN-IF A CHARGING PUMP IS NECESSARY (AS FOR VOLATILE FLUIDS, FOR EXAMPLE.)
- 5) IF DESIRED, A TWO-WAY MOTOR-OPERATED BY-PASS VALVE MAY BE USED RATHER THAN A MANUAL TYPE. IT SHOULD BE DESIGNED TO OPEN AUTOMATICALLY WHILE STARTING OR STOPPING.
- 6) FEED LINE AND BY-PASS LINE SHOULD FEED LIQUID INTO TANK BELOW MINIMUM LIQUID LEVEL.

Insufficient tension results in slippage, burning, squealing (especially during starting) and shortened belt life. Overtightening imposes excessive loads on pump and motor bearings and can cause early shaft fatigue failure.


Use the following table in adjusting V-belt tension:

| Belt Cross-Section | Tension at Mid-Span | |
|--------------------|---------------------|-------------------|
| | New Belts | Used Belts |
| "B" | 5 – 6 lb. | 3-1/4 – 5 lb. |
| "C" | 9-3/4 – 13 lb. | 6-1/2 – 9-3/4 lb. |
| "3V" | 4 – 10 lb. | 3 – 7-1/2 lb. |
| "5V" | 17 – 30 lb. | 13 – 23 lb. |

Applying the above forces with a small spring scale, adjust motor position to provide the following deflection at mid-span:

| Approx. Center Distance (Span), inches | Deflection, inches |
|--|--------------------|
| 16" | 1/4" |
| 22" | 3/8" |
| 28" | 7/16" |
| 32" | 1/2" |
| 40" | 5/8" |
| 48" | 3/4" |
| 60" | 15/16" |

Belts must be matched in pitch length. If one or two belts are slack, when the others are correctly tensioned, investigate for possible reasons. Correct any misalignment or lack of matching so each belt will transmit its load share.

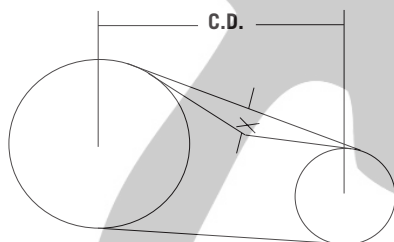

Sheaves must be balanced to prevent abnormal vibration. Balancing weights must **NOT** be removed. Type "QD" sheaves must be evenly tightened on their tapered hubs to avoid rim wobble and severe lateral vibration. V-belts which snap and jerk will produce abnormal vibration and loads on both pump and motor or engine.

Run the pump several minutes at full load with belt guard removed, observing for uneven motion on the belt slack side, especially.

When an old V-belt drive becomes unserviceable, replace **ALL** belts, not just the broken or cracked belts. Do not operate belts on sheaves having worn, rusted, greasy or broken grooves. Shut off power to driver before servicing drive or pump.

WARNING: Do not operate without appropriate guards in place.

DIRECTION OF ROTATION


Before placing pump in operation, check that crankshaft rotation agrees with the arrows cast on top of the power frame by briefly jogging the electric motor. Crankshaft rotation must be clockwise as viewed from the right side of pump.

If pump is gear driven, remember that the pinion shaft turns opposite the crankshaft, if using a single-reduction geared drive or in the same direction as the crankshaft when using a planetary gear.

AUTOMATIC (SAFETY) SHUTDOWNS

Carefully check all electric shutdown devices present, such as crankcase oil level, discharge pressure, vibration, lubricator oil level, motor thermostat, etc.

CRANKSHAFT ASSEMBLY

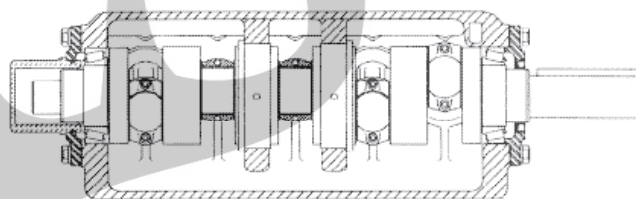

GENERAL

Myers Apex Series quintuplex crankshaft suspension utilizes two single-row tapered bearings, which are shim adjusted to provide the correct running clearance and two journal bearings on either side of the center connecting rod.

Thorough cleaning of all components prior to assembly is essential.

Power frame, shaft, bearings and retainer **MUST** be scrupulously scrubbed with clean solvent (such as kerosene) before starting. Remove any oil, dirt, rust and foreign matter which might prevent the correct fit up.

Crankshaft journals are critical. Remove all burrs, rust spots, and nicks, paying special attention to the ground areas on which bearings and oil seals operate.

TAPERED ROLLER BEARINGS

Shaft and frame tolerances provide a tight (press) fit on the shaft and tap fit in the frame. The best way to install the cone assembly (consisting of the inner race, cage and rollers) on the shaft is to heat the cone assembly in an electric oven for 30 minutes at 300 to 400°F. No More! (**DO NOT** heat bearings with an acetylene torch. This ruins the bearings!) Using clean,

insulated gloves, remove the hot cone assembly from the oven, promptly dropping it on to the shaft.

The cone assembly **MUST** contact the seat thrust face (not be cocked) and the large end of the rollers **MUST** be down. Do not hammer on the bearing. The soft steel cage is easily distorted, ruining its function as a roller separator and guide against skewing. If the cone does not contact its thrust face properly, it must be pressed into place using a specially machined sleeve (which does not touch the soft steel cage). A hydraulic press is recommended if this difficulty arises.


CENTER BEARINGS

The two center bearings are pressed into the powerframe bore, one from the right and one from the left. The drilled indentation on the bearing must be aligned with drilled and tapped hole in the back of the power frame. After the bearing is pressed into place, this indentation must approximately line up to allow use of the locking set screw. Press into place until the flange on the bearing faces out on the counter bore in the powerframe. This ensures the bearing is not cocked. After the bearings are in place, lock them with the set screw.

INSTALLING CRANKSHAFT

GENERAL

Stand the power frame casting on the floor or on a bench with the fluid end face down and crankshaft end up. Insert one bearing cup in the left frame cup bore and shoulder it against the bearing retainer with a rubber mallet. Pass the crankshaft through the right frame bore. Pass the crankshaft through the center bearings and against the installed cup until the bearing cone seats into the left bearing cup. Insert a second bearing cup over the right hand crankshaft journal. Install O-Ring on the crankshaft extension guard. Tap the guard over the crankshaft extension if an auxiliary drive is not being used.

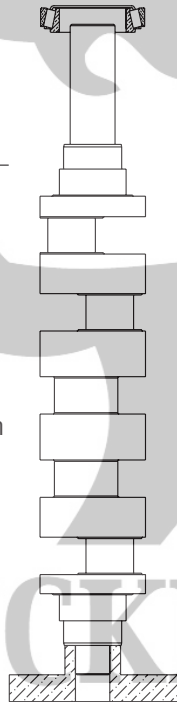

SHIM ADJUSTMENT OF TAPERED ROLLER BEARINGS

To provide for crankshaft thermal expansion, sufficient shims (located beneath bearing retainer flange) must be installed to provide .005" to .015" lateral end play, when shaft is cold.

Separate the shims set (which consists of two .020"; three .007"; and three .005" thick shims). Select one .020" shim and the bearing retainer and position them over the bearing retainer.


Insert two of six hex head cap screws 180° apart and tighten alternately until the bearing cup is seated. Place a magnetic base indicator on the exposed end of the crankshaft with indicator spindle against the side of power frame. Move crankshaft laterally with a pry bar first left and then right, observing movement indicated in each direction. The lateral end play should be only .005" to .015". Remove the bearing retainer and add shims as needed. Repeat the procedure above until the proper end play tolerance is obtained. Install the remaining four cap screws.

The recommended tightening torque for bearing retainer 1/2"-13UNC cap screws is 59 to 72 Ft. Lb.

INSTALLATION OF CRANKSHAFT OIL SEAL

Insert oil seal over the end of crankshaft and position it into the oil seal bore in the power frame or bearing retainer. Using a rubber mallet, tap it into the bore until the face of the seal is flush with the power frame or bearing retainer.

CONNECTING ROD, CROSSHEAD AND CROSSHEAD PIN ASSEMBLY:

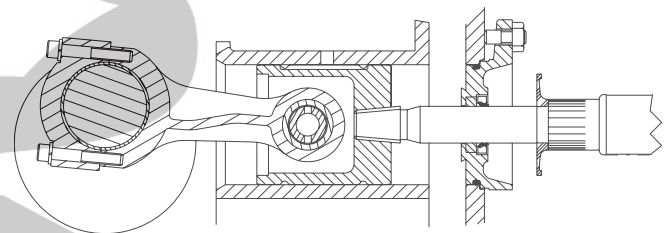

GENERAL

Myers Apex Series connecting rod assemblies employ precision automotive type steel-backed, babbitt-lined crankpin bearing halves which require no shims for clearance adjustment. This pump employs full-circle (piston type) crossheads.

Plungers are provided with a knurled wrenching area to permit tightening of the tapered thread into the crosshead, establishing accurate alignment while affording easy field installation.

Before beginning the assembly all parts must be scrupulously cleaned, removing all oil, dirt, rust and foreign matter which prevent proper fitting, or which might tend to score the rubbing surfaces. Clean and examine the power frame bores for scoring and

abnormal wear, especially wear of the lower crosshead guide way. Hone smooth, if rough.

Measure the bores of the frame using inside micrometers to determine abnormal frame wear if any.


| New Crosshead OD: 3.243/3.246 New Frame Bores: 3.253/3.250 | New Crosshead OD: 3.996/3.993 New Frame Bores: 4.000/4.004 |
|---|---|
| MA-45M | MA-75L |
| SC-80 | MA-75M |
| SC-80H | MA-75H |
| RO-72 | SC-115 |
| | SC-115L |
| | SC-115H |
| | RO-117 |

Frame bores which have become worn more than .015" must be sleeved with a cast iron liner to re-establish correct geometry and alignment. Contact Myers Aplex Series concerning the repair of badly worn frame bores.

Smooth any rough corners and edges on the crosshead skirts, using fine emery cloth. Examine and clean the female tapered threads and wrist pin holes.

INSTALLING WRIST PIN BUSHINGS

The wrist pin bushing is precision machined bearing bronze which is press fitted into the eye of the connecting rod.



| Bushing O.D.: 1.378/1.377 Connecting Rod Eye Bore: 1.3750/1.3760 | Bushing O.D.: 1.6280/1.6270 Connecting Rod Eye Bore: 1.6250/1.6260 |
|---|---|
| MA-45M | MA-75L |
| SC-80 | MA-75M |
| SC-80H | MA-75H |
| RO-72 | SC-115 |
| | SC-115L |
| | SC-115H |
| | RO-117 |

Carefully align the bushing with its hole and after applying oil to bushing O.D. use a hydraulic press to force it home. When a bronze bushing is pressed into place, the I.D. (bore) of the bushing is reduced somewhat, owing to the extent of press fit. Therefore, a clean, new wrist pin should be inserted into the

bushing bore to establish that running clearance has been obtained. The running clearance between the wrist pin and installed bushing is:

| New Pin OD: 1.0640/1.0635 Installed Bushing Bore: 1.0645/1.0650 | New Pin OD: 1.3140/1.3135 Installed Bushing Bore: 1.3145/1.3155 |
|--|--|
| MA-45M | MA-75M |
| SC-80 | MA-75L |
| SC-80H | MA-75H |
| RO-72 | SC-115 |
| | SC-115H |
| | SC-115L |
| | RO-117 |

Oil Clearance0005/.0015"


Replacement bushings are furnished pre-bored by Myers Aplex Series which usually eliminates the need to ream the installed bushing bore. However, due to slight variations in finishes and tolerances, it sometimes happens that more than predicted contraction of the I.D. occurs. This occurrence results in a slight interference which may be eliminated by lightly honing the bore of the bronze. (**NOT** by reducing the pin size!) An automotive engine repair shop usually is equipped with power honing machines capable of smoothly finishing the bushing bore. Bore of bushing must be round and free of taper.

PINNING THE CROSSHEAD

A pressfit is employed between the crosshead pin and crosshead to secure the pin against any motion. A hydraulic press is employed to force the pin thru the bosses of the crosshead.

A mishap during insertion can occur causing the ruin of the pin or the crosshead, if during application of pressure:


- Pin is not aligned absolutely square with the crosshead.
- Crosshead is not supported on v-blocks so it can roll while under load.
- Connecting rod is not fully supported so pin cannot enter the bushing without damage to it. This will damage the bushing.
- Failure to oil pin O.D. and crosshead bores, to prevent galling. Use clean motor oil.

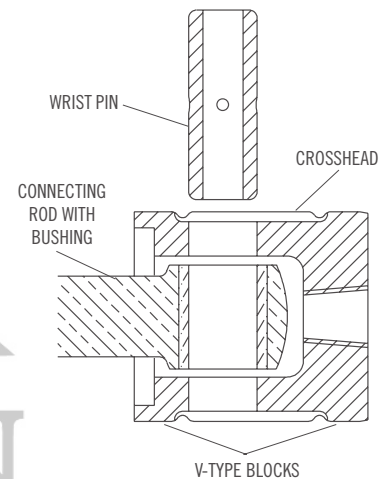

After installing the pin, carefully check the crosshead O.D. to see if it is out-of-round. If so, a smart blow with a rubber mallet will restore the crosshead O.D. into its original roundness.

ORDER OF ASSEMBLY

The connecting rod/crosshead assembly is installed **AFTER** the assembly of the crankshaft. The rod and crosshead will pass through the wiper box wall bore. With the frame in the horizontal position, load the rods through the cradle.

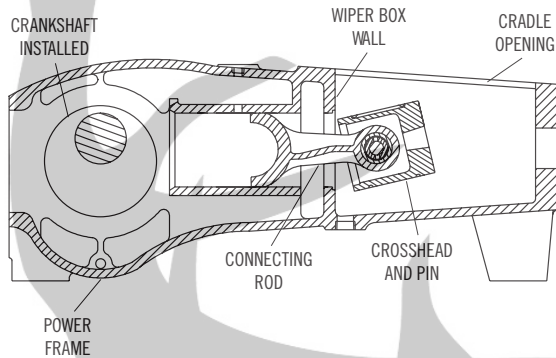


PRECISION CRANKPIN (CRANKTHROW) BEARINGS

Myers Apex Series pump crankpin bearings require no shimming to establish correct running clearance. Precise machining of the connecting rod, caps and crankpin journals is necessary to achieve this convenience.

| New Crankpin O.D.: 2.250/2.249 | New Crankpin O.D.: 2.749/2.748 |
|---|---|
| New Connecting Rod Bore: 2.3944/2.3955 | New Connecting Rod Bore: 2.941/2.942 |
| MA-45M | MA-75L |
| SC-80 | MA-75M |
| SC-80H | MA-75H |
| RO-72 | SC-115 |
| | SC-115L |
| | SC-115H |
| | RO-117 |

Crankpins which are worn out-of-round, tapered, or badly scored should either be discarded or perhaps salvaged by grinding undersize, hard chrome-plated, and finish ground to above diameter. Connecting rod/cap bore must be perfectly round and within above sizes and free of taper. Discard if elliptical or tapered as the result of abnormal heating. Each cap and rod is match-marked for correct identification. Take care that each cap is re-installed properly with its companion

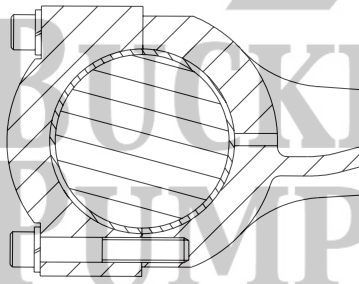

rod. Bearing halves are identical and are prevented from rotating by tongues which fit into slots in the cap.

Check that all oil holes are clean and fully open. **GRIT** is the greatest enemy of bearings, however precisely manufactured. Hence, all surfaces must be perfectly clean and lightly oiled prior to assembly. Remove any burrs or sharp corners which prevent the perfect fitting of these precision bearings. Using a torque wrench, tighten cap bolts as follows:

| Thread Size: 5/16" – 18UNC Tightening Torque: 19 Ft. Lb. | Thread Size: 3/8" – 16UNC Tightening Torque: 26 Ft. Lb. |
|---|--|
| SC-80 | SC-115 |
| SC-80H | SC-115H |
| RO-72 | SC-115L |
| MA-45M | RO-117 |
| | MA-75M |
| | MA-75H |
| | MA-75L |

Specified torque, applied to clean, well-oiled threads and bearing faces, will create tensile stresses in the cap bolts from 90,000 to 110,000 psi, approximately and will provide correct initial tension. Myers Apex Series pumps utilize high strength cap bolts suitable for these initial loadings, maintained by hardened spring lockwashers.

After all rods and caps are secured, slowly turn the crankshaft to be sure no bearing is in a bind.

Using a flashlight, examine the location of each connecting rod (eye end) within its crosshead. Rods must not touch any crosshead boss or skirt.

WIPER BOX ASSEMBLY

GENERAL


Extension rod wiper boxes (sometimes referred to as the diaphragm stuffing box, or stripper housing assembly) serve **two** important functions: retention of crankcase oil in the power end and exclusion of dirt and water.

Myers Apex Series has developed a unique sealing set which operates on a hardened and ground stainless steel extension rod (often called "pony" rod), and a rubber baffle disc affording protection against leaking plunger packing. The seals require no adjustment, only correct and careful assembly.

"POLY PAK" SEAL

This seal keeps oil from leaking out of the powerframe. Developed by the Parker Seal Group, this patented rod seal employs a soft nitrile rubber O-Ring to energize a


special hard polyurethane “Molythane” shell by forcing the inner lip against the rod and the outer lip against the housing bore, as shown.

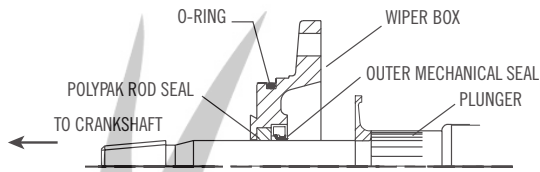

The “Poly Pak” seal is inserted into its counter bore with its lips directed toward the oil in the crankcase. (Will **NOT** work if installed backwards!)

MECHANICAL OIL SEAL


The oil seal is to keep contamination out of the powerframe. With the box positioned in a hydraulic press, install the backup seal against the “Poly Pak” seal, with the lips of both seals facing downward.

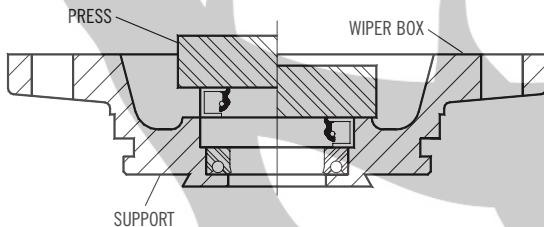

The mechanical seal contains a garter spring. Check to see that this spring is still properly located and in its position. The mechanical seal has a metal case which serves to force the “Poly Pak” seal into its cavity, energizing its lips. Apply oil lightly to the bore of the box before pressing each seal into its counterbore.

INSERTING THE PLUNGER

Insert the integral extension rod plunger through the fluid end and through the stuffing box. Insert the extension rod through the wiper seals with the tapered thread and entering **FIRST**. Next, install rubber baffle plate by oiling the extension rod portion of the plunger. This baffle plate seats into a reduced diameter next to the knurled shoulder. Care should be used in moving the male tapered thread through wiper seals to prevent dislocating the garter spring or damaging seal lips.

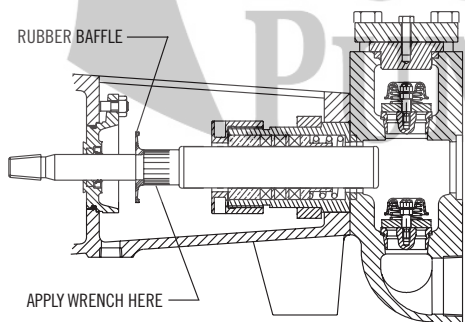

Fasten the wiper box to the power frame by evenly tightening the two nuts on the wiper box studs. Oil leakage between frame face and wiper box is prevented by an O-Ring on the O.D. of the wiper box.


With extension rod inserted through the wiper box seals, thread the tapered threads (must be clean!) into the tapered crosshead female threads. Firmly tighten, apply wrench to the knurled area only. Never damage the extension rod ground surfaces!

STUFFING BOX, PACKING AND PLUNGER ASSEMBLIES

GENERAL

Myers Apex Series pumps all feature field removable and replaceable stuffing boxes. These pumps also have integral extension rods. The plungers may be removed separately (without box removal) to facilitate re-packing. The integral extension rod type plunger may be removed by removing the cylinder head plug and retainer plate allowing the plunger to be removed through the fluid end, after unscrewing it from the crosshead. It is not necessary to disturb the fluid end or piping.

SPRING LOADED PACKING

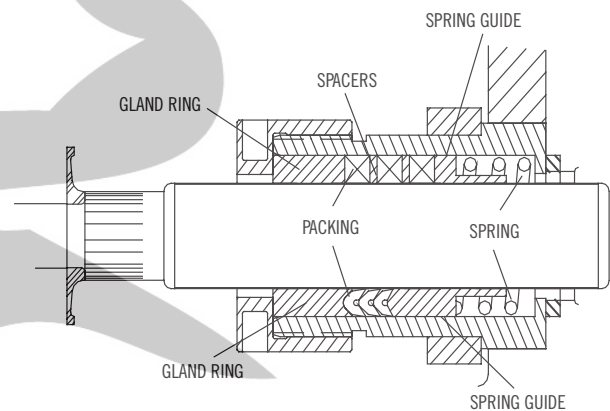

Note that the gland is screwed tightly onto the box and contacts its face. The spring is providing all of the initial compression and adjustment. No adjustment is provided by the gland.

Since the force exerted by the spring is contingent on the space provided for it, the correct lengths of all rings is essential for good tensioning.

Spring:

A stiff Inconel spring, which closely fits the bore of the stuffing box, is used in this assembly. This spring is compressed in a vise to the operating length required plus 0.25" and tied with waxed nylon spot tie cord.

The cord is looped over the ends of the spring through the coils and tied to maintain the length mentioned above. Each spring is assembled into the stuffing box. Note that the spring does not contact the plunger.

Spring-Guide Ring:

Plungers are heavy and the importance of a well-fitted guide ring which carries this weight is often overlooked. Discard any guide ring which becomes worn or scored, as it will then not serve its purpose. It should fit snugly in the box. Apply oil generously to this ring.

Spring Loaded Packing:

Three (3) rings of chevron or compression packing are installed next. For compression packing, install them with the skive intersections 180° apart to discourage leaking.

Gland Ring:


This ring also fits the plunger and helps support the plunger weight. Discard it if bore is worn, rough or out-of-round. Lightly oil the ring before insertion.

HI/LO GLAND ADJUSTABLE PACKING

The Myers Apex Series Hi/Lo adjustable packing was designed to provide sealing of the plunger in either high or low pressure operation. The packing is non-lubricated and user adjustable.

If the packing begins to wear and leak (liquid running out of the cradle drain hole) the gland can be tightened. Tightening will increase packing preload and will control leakage. Adjustments (with the pump running) should be in 1/2 to 1/6 of a turn of the gland nut. There are 6 gland adjustment holes on the nut, so 1/2 to 1 hole rotation will be desirable.

When a bentonite slurry is being pumped, it is normal for a "Putty" like material to collect at the packing plunger interface. This is nothing more than bentonite with most of the water evaporated. As this material begins to collect, this is the first sign that the packing could be adjusted. Over-tightening will unnecessarily shorten packing life.

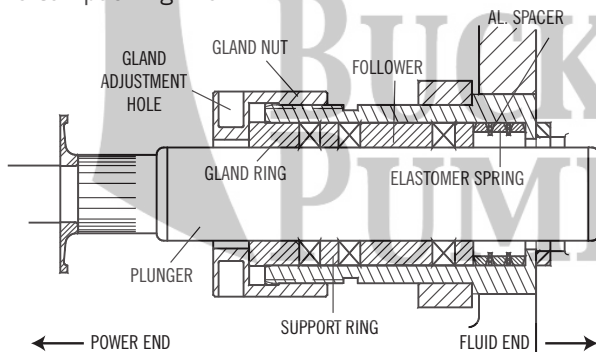

The Hi/Lo packing is totally retrofittable to existing Myers Apex Series pump. Use the drawing for proper reassembly order.

Initial gland tightening should be 2 to 2-1/4 turns past hand tight. If there is a grease fitting in the stuffing box, remove it, use a 1/8" pipe plug and plug the hole. (Caution, make sure the plug does not protrude down into the ID of the stuffing box. If the plug is too long, grind off the end and try again.)

INSERTING THE PLUNGER

Apply oil liberally to plunger O.D. and lightly tap it through the packing. When introducing the plunger through the stuffing boxes, also apply oil liberally to the O.D. of each integral extension rod to allow easy passage through the wiper box seals.

A soft rubber mallet is recommended to avoid any damage to the plunger face or its threads. Remember: The fragile nature of packing rings and plunger surfaces deserve your respect and avoidance of careless damage to these key elements!

INSTALLING THE GLAND

Considerable downward pressure on the gland is required to compress the spring and to move the packing into location, and to start the threads of the box.

Once the gland threads are started, screw it down completely until it makes up tightly against the face of the box for spring loaded packing. For Hi/Lo, J-Style or gland adjusted packing, tighten the gland until it is seated firmly against the packing.

INSTALLING THE LIQUID END

The two double-ended studs should be installed into the power frame from the liquid end side before bolting the liquid end up. The fluid end is retained on the power end by two socket head cap screws. No dowel pins or other alignment techniques are needed since the power frame provides alignment to the stuffing boxes individually. These two cap crews should be left loose until the dowel pins in the stuffing boxes locate properly in the liquid end. After this is accomplished tighten the outer screws. These two screws should be tightened before the stuffing boxes.

The torque value for each pump should be as follows:

| 3/4" – 10UNC at 160 Ft. Lb | 7/8" – 9UNC at 250 Ft. Lb. |
|----------------------------|----------------------------|
| MA-45M | MA-75L |
| SC-80 | MA-75M |
| RO-72 | MA-75H |
| | SC-115 |
| | SC-115L |
| | SC-115H |
| | RO-117 |

INSTALLING THE STUFFING BOX

Myers Aplex Series stuffing boxes derive their alignment from the bores of the power frame and the faces of the fluid end, so these surfaces **MUST** be cleaned of rust, scale and dirt before assembly is begun. Wash all contacting surfaces with clean solvent and dry with a **CLEAN** shop towel.

A nitrile rubber seal is used to seal between the face of the fluid end (must be flat, clean and smooth) and the face of the box. Replace if damaged.

The fluid end is retained on the power end by two socket head cap screws. No dowel pins or other alignment techniques are needed since the power frame provides alignment to the stuffing boxes individually. These two screws should be tightened before the stuffing boxes. The torque value for each pump should be as follows:


| 3/4" – 11UNC at 160 Ft. Lb. |
|-----------------------------|
| SC-80H |

All stuffing boxes are retained by large bolts which extend through the liquid end, serving to clamp the box tightly against the fluid end face.

Using a socket extension and torque wrench, tighten clean, well-oiled threads and nut faces as follows:

| Long Screws Stuffing Box | | |
|----------------------------|-----------------------------|-----------------------------|
| 5/8" – 11UNC at 75 Ft. Lb. | 5/8" – 11UNC at 100 Ft. Lb. | 3/4" – 10UNC at 125 Ft. Lb. |
| MA-45M | SC-80H | MA-75L |
| SC-80 | | MA-75M |
| RO-72 | | MA-75H |
| | | SC-115 |
| | | SC-115L |
| | | SC-115H |
| | | RO-117 |

Snug up all the long screws before tightening the nuts on the two center studs inside the cradle.

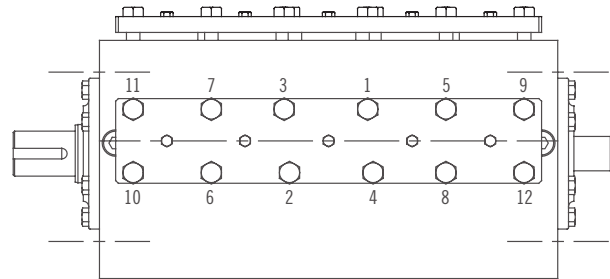

Failure to fully and evenly tighten these studs (or cap screws) can lead to early failure, plunger mis-alignment and failure, and short packing life. Retighten after 500 hours of operation.

CONNECTING THE PLUNGER

Install the rubber baffle on to the integral extension rod, sliding it against the knurled shoulder of the plunger. Roll the pump crankshaft slowly until the plunger male threads touch the mating female threads in the crosshead.

Applying a pipe wrench to plunger knurled area, thoroughly tighten the connection. **DO NOT** use a "cheater" when connecting plunger to extension rod. (Serves no useful purpose and may damage the connection!)

PACKING

Packing life for Aramid fiber packing may be improved in some applications by regular, systematic lubrication. An optional force feed lubricator assembly is often recommended, especially for pumps on continuous duty. This provides regular, controlled supply of lubricant, lowering friction and heat.

Additionally, the regular application of the correct lubricant aids dissolving of salt and gyp tending to build up on the plungers in produced water applications. For this service, Rock Drill Lubricant is a popular and effective packing lubricant.

Plungers in CO₂, ethane, or other very cold liquid services may use brake fluid. This fluid does not congeal into a solid which cannot enter the packing. Consider the use of an air-sealed cradle into which dry (instrument) air may be directed, excluding the moisture which causes plunger icing especially in very humid conditions.

Packing lubricant for pumps on light hydrocarbons, hot water, lean oil, naphtha, or gasoline often require experimentation.

A good start is to use steam cylinder oil. Castor oil is sometimes successful as a packing lubrication

for liquid propane and butane services, at ambient temperature.

In pumps placed in arctic service, a special low pour point oil is indicated.

Packing lubrication is not permitted on some services, such as an amine, food stuffs, etc. and other packing styles and materials may be required.

PLUNGERS


Myers Apex Series offers its own unique product: the Myers Apex Series “Rokide” plunger. This premier quality plunger consists of a chromium oxide deposition on a solid stainless steel body.

Ordinary handling will not damage this fine product. Avoid striking the coated surface (black) during installation. Apply light forces only on the ends of the plunger. Do not hammer or pry.

All threads on Myers Apex Series plungers must be **CLEANED** and oiled before assembly. Stainless steel (although very corrosion resistant) has a tendency to gall and seize. To avoid this, an anti-seizing lubricant is well worth its use. Apply oil to the threads.

Myers Apex Series can supply solid ceramic plungers on order. This plunger is very fragile, vulnerable to thermal and mechanical shock, and must be handled with the greatest care. Use only a rubber mallet to insert it into the packing. Other plunger types are available upon request.

CONVERTING PLUNGER TO PISTON

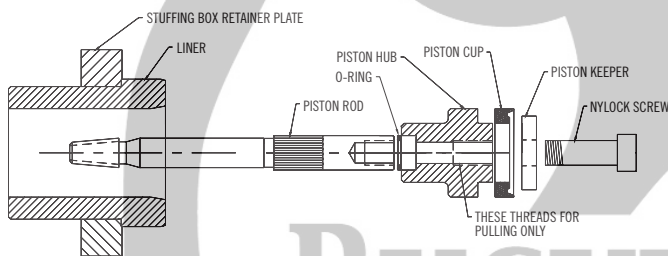

DISASSEMBLY

1. Remove the 8 cap screws and the cylinder head retaining plate from the front of the liquid end.
2. Unscrew the 3 glands from the stuffing boxes and remove. Unscrew the 3 plungers from the crossheads and work them gently through the wiper box seals and plunger packing. Pull them out the front of the pump.
3. Pull the stuffing box retainer plate to the back of the cradle and remove the 3 stuffing boxes.

REASSEMBLY

1. Install the 3 liners in place of the stuffing boxes. The milled flat spots must be aligned to get the liners in the powerframe.
2. Pull the stuffing box retainer plate over the 3 liners.
3. Snap the piston cup over the piston hub. Assemble the piston rod, O-Ring, piston assembly, piston keeper and nylock socket head cap screw (12mm hex) together.
4. Insert the entire piston assembly through the liquid end, liner and wiper box and screw into the crosshead. Once it is assembled you can tighten the nylock screw into the piston rod.
5. Reinstall the cylinder head retainer plate and 8 cap screws. Torque in an even manner as shown in the service manual.

CHANGING PISTON CUPS

1. Remove the 8 cap screws and the cylinder head retaining plate from the front of the liquid end.
2. Unscrew the nylock socket head cap screw (12mm hex) and remove with piston keeper.
3. Screw a 5/8"-11UNC all thread stud into the piston hub and remove from liner. Make sure the O-Ring comes out also.
4. Change piston cup and reinstall with a new O-Ring and nylock screw. Inspect the piston hub for wear. It should be changed periodically.
5. Reinstall the cylinder head retainer plate and 8 cap screws.

DUAL-STEM GUIDED AND DISC VALVE SYSTEMS


GENERAL

Myers Apex Series has developed a unique setting/puller system permitting quick, easy and safe methods of installing and removing tapered seat valves.

The system allows servicing without distortion of the seat, with minimum effort and **NO** damage to fluid end tapers or seat.

Tapered seats notoriously drive solidly down into mating deck tapers, so firmly that extraction heretofore has always posed severe problems. Old style valves may be pulled only with the greatest effort, using “J” puller heads (prone to failure), CO₂ – Dry Ice, and other improvisations.

DISC VALVE CONSTRUCTION

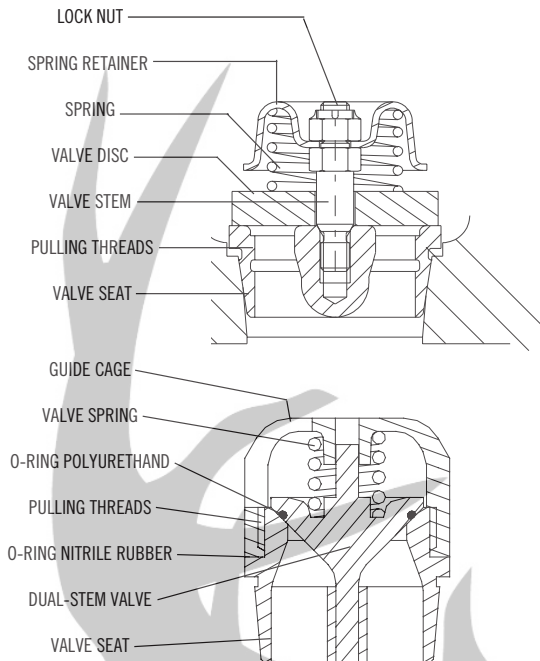

The Myers Apex Series valve is a precision made sub-assembly utilizing threads cut into the rim of seat for use with Myers Apex Series setting/pulling tool. These threads **DO NOT** deteriorate as proven by field experience. By locating these on the rim setting/pulling forces are now applied only to the rim of the seat, never to the webs (or “spokes”), or to the center section. Distortion of the seat is eliminated.

Access to these seat threads is provided by the removal of the valve cage on D.S.G. valves or the spring retainer on Disc valves, which is screwed onto the seat. An anti-seizing lubricant applied to all threads is good insurance against future difficulty.

SETTING THE VALVE SEAT

Effective pressure-sealing between tapered (male) seat and tapered (female) fluid end deck is possible **ONLY** if the tapers are absolutely clean and dry just prior to installation. Thoroughly clean surfaces using a clean solvent. Dry with a **CLEAN** shop towel.

Examine the cleaned fluid end deck tapers, using a flashlight, and remove all deposits of gyp, salt, or other encrustation. Lightly emery cloth any minor imperfections found in the deck taper.

INSTALLING THE VALVE SEAT


The puller stem and puller head are provided with tapered (locking) threads. Screw them together using two pipe wrenches applied to the knurled areas provided. Then, screw the valve seat onto the puller

head by hand until it shoulders against the puller shoulder. Back off 1/16" of a turn. Do not tighten.

Lower the seat and tool into the fluid end, squarely setting the seat into the deck. Then strike the top of the stem with a 6 pound hammer until a solid metallic sound is heard, usually 2 or 3 blows. Unscrew the head and stem from the seat using a 1/2" bar (or screwdriver) in the hole provided at the top end of the stem.

INSTALLING O-RINGS, DUAL STEM GUIDED SPRING AND CAGE

Install Nitrile O-Ring over the threaded section of the seat and position it at the bottom of the threads. Install the polyurethane O-Ring into the valve and position it into the groove. Position the valve into the hole in the center of the installed seat. Install the valve spring. Apply anti-seizing lubricant to the threads of the valve cage and screw the cage on to the threaded valve seat with cage setting tool.

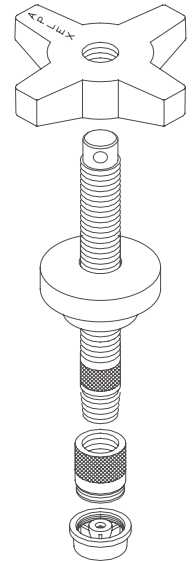

INSTALLING DISC, SPRING, DISC VALVES AND STEM:

Myers Apex Series offers discs of “Delrin” acetal resin, of 17-4PH S.S. hardened and ground, and of titanium alloy.

Position the disc and Inconel spring on the seat, aligning the hole in the disc with the stem threads in the seat center.

The stem, spring retainer and locknut are shipped from Myers Apex Series already assembled and tightened with a torque wrench with “Loc-Tite” sealant added to the top stem threads only.

Torque 16 Ft. Lb.

CLEANLINESS of threads and other contacting surfaces is of paramount importance in the assembly of all valve elements.

PULLING THE VALVE SEAT

First drain the fluid end entirely. For D.S.G. valves, use the cage wrench to unscrew the cage from the seat. For Disc Valves unscrew the stem from the seat. Remove the cage, spring and valve from the fluid end. Attach the Myers Apex Series puller head to the puller stem, tighten their tapered threads with a pipe wrench applied to the knurled areas of the puller stem and head. Lower the stem and head into the fluid end and engage the threads of the head onto the

seat threads. Using a 1/2" bar (or screwdriver) rotate the head clockwise, thread it fully onto the seat but **DO NOT** tighten.

REMOVING THE VALVE SEAT

Slide the bridge over the stem. Clean and oil the stem threads. Oil the face of the wing nut. Thread wing nut down onto the stem, seating it on the bridge top firmly. Extract the seat from the pump by striking the wing nut with a heavy hammer (a hydraulic ram may also be

used). Stand clear of the pump when applying heavy tonnage, as the entire assembly will jump violently upwards when the pulling energy is suddenly released.

The Myers Apex Series puller/setting tool and gage tool are custom designed and built for each specific Myers Apex Series pump model. The same puller head is used on both suction and discharge seats. The bridge is made to fit each model and its proper use will not damage the valve cover gasket machined counterbore on the top of the fluid end.



TROUBLE LOCATION AND REMEDY

| Trouble | Possible Cause | Remedy |
|---|---|---|
| Pump fails to deliver required capacity. | Speed incorrect. Belts slipping. | Change drive ratio or tighten belts (if loose). Correct motor speed. |
| | Air leaking into pump. | Seal with compounds. |
| | Liquid cylinder valves, seats or plungers worn. | Reface or lap valves and seats; replace packing or plungers. |
| | Insufficient NPSHA. | Increase suction pressure. |
| | Pump not filling. | Prime pump. |
| | Makeup in suction tank less than displacement of pump. | Increase makeup flow. Reduce pump speed. |
| | Vortex in supply tank. | Increased liquid level in supply tank. Install vortex breaker. |
| | One or more cylinders not pumping. | Prime all cylinders. Allow pump to operate at low pressure through bypass valve to eliminate vapor. |
| | Suction lift too great. | Decrease lift. Raise tank level. |
| | Broken valve springs. | Replace. |
| | Stuck foot valve. | Clean. |
| | Pump valve stuck open. | Remove debris beneath valve. |
| | Clogged suction strainer. | Clean or remove. |
| | Relief, bypass, pressure valves leaking. | Repair. |
| Suction and/or discharge piping vibrates or pounds. | Piping too small and/or too long. | Increase size and decrease length. Use booster pump. Use suction and/or discharge pulsation dampeners. |
| | Worn valves or seats. | Replace or reface. |
| | Piping inadequately supported. | Improve support at proper locations. |
| Pump vibrates or pounds. | Gas in liquid. | Submerge return, supply or makeup lines in suction supply tank. If operating under a suction lift, check joints for air leaks. |
| | Pump valve stuck open. | Remove debris beneath valve. |
| | Pump not filling. | Increase suction pressure. |
| | One or more cylinders not pumping. | Prime all cylinders. Allow pump to operate a low pressure through bypass valve to eliminate vapor. |
| | Excessive pump speed. | Reduce. Check drive ratio. |
| | Worn valves or seats. | Replace or reface. |
| | Broken valve spring. | Replace. |
| | Loose plunger. | Tighten. |
| | Loose or worn bearings. | Adjust or replace. |
| | Worn crossheads or guides. | Replace. |
| | Loose crosshead pin. Loose connecting rod cap bolts. | Adjust or replace. |
| | Pump running backwards. | Correct rotation. |

TROUBLE LOCATION AND REMEDY

| Trouble | Possible Cause | Remedy |
|--------------------------------------|---|--|
| Consistent knock. | Water in power end, crankcase. | Drain. Refill with clean oil. |
| | Worn or noisy gear. | Replace. |
| | Worn or loose main bearing, crank pin bearing, wrist pin bushing, plunger, valve seat, low oil level. NOTE: High speed power pumps are not quiet. Checking is necessary only when the sound is erratic. | Adjust or replace. Add oil to proper level. |
| Packing failure (excessive). | Improper installation. | Install per instructions. |
| | Improper or inadequate lubrication. | Lubricate per instructions. |
| | Improper packing selection. | Change to correct packing. |
| | Scored plungers. | Replace. |
| | Worn or oversized stuffing box bushings. | Repair or replace. Check bore and outside diameter of bushings frequently. (Many times plungers are replaced and bushings ignored.) |
| | Plunger misalignment. | Realign. Plungers must operate concentrically in stuffing box. |
| Wear of liquid end parts. | Abrasive or corrosive action of liquid. | Check valves and seats frequently at start-up to determine schedule for replacing, etc. Eliminate sand, abrasive, air entering pump. |
| | Incorrect material. | Install correct materials. |
| Liquid end cylinder failure. | Air entering suction system. | Eliminate air. NOTE: Pitting often leads to hairline cracks which ends in cylinder failure. |
| Wear of power end parts (excessive). | Poor lubrication. | Replace oil as recommended in instructions. Keep oil clean and at correct temperature. Be sure oil is reaching all bearings. |
| | Overloading. | Modify pump or system to eliminate overload. |
| | Liquid in power end. | Drain power end. Eliminate cause or source of liquid entering power end. Relubricate. |

BUCKHORN
PUMPS, INC.


TROUBLE LOCATION AND REMEDY

| Trouble | Possible Cause | Remedy |
|--|--|---|
| Excessive heat in power end. (Above 180°F.) | Pump operating backwards. | Correct rotation. |
| | Insufficient oil in power end. | Fill to proper level. |
| | Excessive oil in power end. | Drain to proper level. |
| | Incorrect oil viscosity. | Fill with correct oil. |
| | Overloading. | Reduce load. |
| | Tight main bearings. | Correct clearance. |
| | Drive misaligned. | Realign. |
| | Belts too tight. | Reduce tension. |
| | Discharge valve of a cylinder(s) stuck open. | Fix valve(s). |
| | Insufficient cooling. | Provide adequate cooling for oil or reduce ambient temperature. |
| | Pump speed too low. | Increase speed. |



BUCKHORN
PUMPS, INC.


Power Frame Assembly; Connecting Rod, Crosshead & Wiper Box Assembly

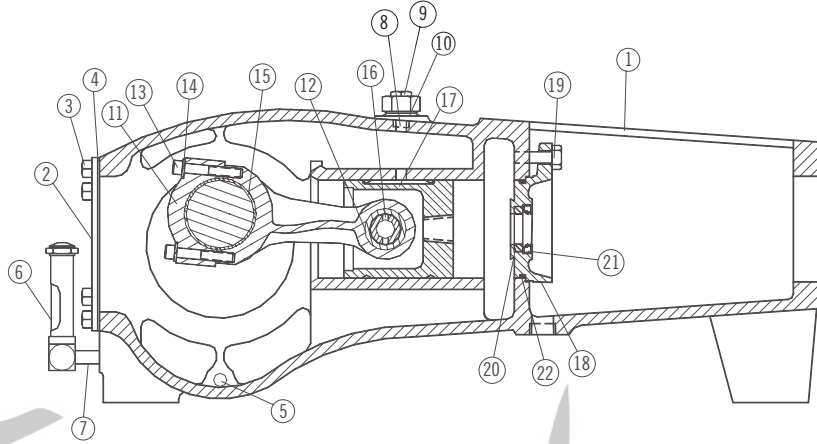

| MA-45M, RO-72 | | | |
|---------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Power Frame | 7206-0053-51K |
| 2 | 1 | Crankcase Cover | 7206-0049-00B |
| 3 | 8 | 3/8" NC Hex Head Cap Screw x 5/8" Long | 100-038058-273 |
| 4 | 1 | Gasket, Crankcase Cover | 7206-0050-00B |
| 5 | 2 | 3/8" Pipe Plug, Square Head | 170-038001-237 |
| 6 | 1 | Oil Level Sight Gage | 7602-3000-00A |
| 7 | 1 | 1/4" Pipe Nipple, Std. Wt. - 2" Long | 157-014112-235 |
| 8 | 3 | 1/8" Pipe Plug, Socket Head | 170-018003-405 |
| 9 | 1 | Breather, Crankcase, 3/4" NPTM | 7602-3002-10A |
| 10 | 1 | 1/2" Pipe Plug, Square Head, Steel | 170-012003-237 |

| MA-45M, RO-72 | | | |
|---------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 11 | 5 | Connecting Rod sub-assembly, which includes: | 7206-0003-00C |
| 12 | 1 | Wrist Pin Bushing | 7206-0004-00A |
| 13 | 2 | Socket Head Cap Screw - 5/16" NC x 2" Long | 105-516200-454 |
| 14 | 2 | 5/16" Reg. Spring Lockwasher | 154-516059-244 |
| 15 | 5 | Crankpin Bearing Pair | 7206-0006-00K |
| 16 | 5 | Wrist Pin | 7206-0005-00A |
| 17 | 5 | Crosshead | 7206-0010-00C |
| 18 | 5 | Wiper Box | 7206-0009-00B |
| 19 | 10 | Hex Head Cap Screw- 3/8" x 1-1/4" Long | 100-038114-273 |
| 20 | 5 | Polypak Ring | 145-100112-999 |
| 21 | 5 | Oil Seal | 145-100158-999 |
| 22 | 5 | O-Ring | 0015100331 |


Power Frame Assembly; Connecting Rod, Crosshead & Wiper Box Assembly

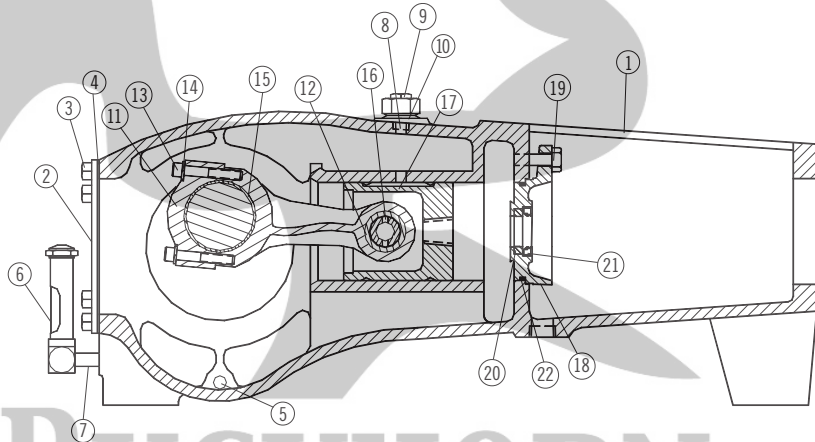

| MA-75M, RO-117 | | | |
|----------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Power Frame | 7203-0251-00K |
| 2 | 1 | Crankcase Cover | 7203-0244-00B |
| 3 | 8 | 3/8" NC Hex Head Cap Screw x 5/8" Long | 100-038058-273 |
| 4 | 1 | Gasket, Crankcase Cover | 7203-0253-00B |
| 5 | 2 | 1/4" Pipe Plug, Square Head | 170-014004-250 |
| 6 | 1 | Oil Level Sight Gage | 7602-3000-00A |
| 7 | 1 | Nipple, Pipe; Std. 1/4" NPT x 1-1/2" | 157-014112-235 |
| 8 | 5 | 1/4" Pipe Plug, Socket Head | 170-014003-405 |
| 9 | 1 | Breather, Crankcase, 3/4" NPTM | 7602-3002-10A |
| 10 | 1 | 3/4" Pipe Plug, Socket Head, Steel | 170-034003-237 |

| MA-75M, RO-117 | | | |
|----------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 11 | 5 | Connecting Rod sub-assembly, which includes: | 7203-0104-00D |
| 12 | 1 | Wrist Pin Bushing | 7203-0115-00A |
| 13 | 2 | 3/8" NC x 2-1/2" Long, Socket Head Cap Screw | 100-038212-454 |
| 14 | 2 | 3/8" Reg. Spring Lockwasher | 05454A007 |
| 15 | 5 | Crankpin Bearing Pair | 7203-0160-00K |
| 16 | 5 | Wrist Pin | 7203-0116-00A |
| 17 | 5 | Crosshead | 7203-0105-00C |
| 18 | 5 | Wiper Box | 7203-0108-00C |
| 19 | 10 | Hex Head Cap Screw - 1/2" x 1-1/2" Long | 100-012112-273 |
| 20 | 5 | Polypak Ring | 145-114178-999 |
| 21 | 5 | Oil Seal | 145-114206-999 |
| 22 | 5 | O-Ring | 001500121 |


Power Frame Assembly; Connecting Rod, Crosshead & Wiper Box Assembly

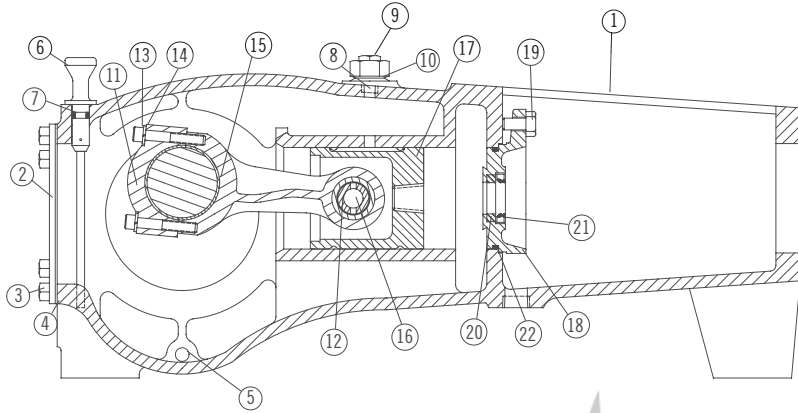

| SC-80, SC-80H | | | |
|---------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Power Frame | 7206-0053-51K |
| 2 | 1 | Crankcase Cover | 7206-0049-00B |
| 3 | 8 | 3/8" NC Hex Head Cap Screw x 5/8" Long | 100-038058-273 |
| 4 | 1 | Gasket, Crankcase Cover | 7206-0050-00B |
| 5 | 2 | 3/8" Pipe Plug, Square Head | 170-038001-237 |
| 6 | 1 | Oil Level Dipstick | 7206-0094-00A |
| 7 | 1 | O-Ring Size #2-203 | 110-000110-201 |
| 8 | 3 | 1/8" Pipe Plug, Socket Head | 170-018003-405 |
| 9 | 1 | Breather, Crankcase, 3/4" NPTM | 7602-3002-10A |
| 10 | 1 | 1/2" Pipe Plug, Socket Head | 170-012003-237 |

| SC-80, SC-80H | | | |
|---------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 11 | 5 | Connecting Rod sub-assembly, which includes: | 7206-0003-00C |
| 12 | 1 | Wrist Pin Bushing | 7206-0004-01A |
| 13 | 2 | Socket Head Cap Screw - 5/16" NC x 2" Long | 105-516200-454 |
| 14 | 2 | 5/16" Reg. Spring Lockwasher | 154-516059-244 |
| 15 | 5 | Crankpin Bearing Pair | 7206-0006-00K |
| 16 | 5 | Wrist Pin | 7206-0005-00A |
| 17 | 5 | Crosshead | 7206-0010-00C |
| 18 | 5 | Wiper Box | 7206-0009-00B |
| 19 | 10 | Hex Head Cap Screw- 3/8" x 1-1/4" Long | 100-038114-273 |
| 20 | 5 | Polypak Ring | 145-100112-999 |
| 21 | 5 | Oil Seal | 145-100158-999 |
| 22 | 5 | O-Ring | 001500331 |


Power Frame Assembly; Connecting Rod, Crosshead & Wiper Box Assembly

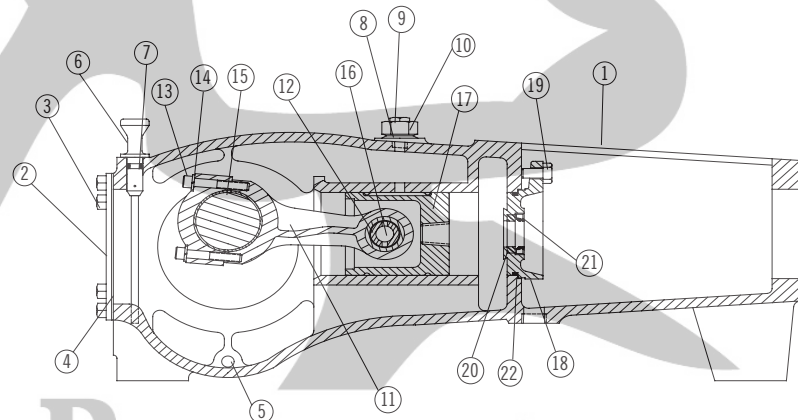

| MA-75L, SC-115L | | | |
|-----------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Power Frame | 7203-0322-00K |
| 2 | 1 | Crankcase Cover | 7203-0244-00B |
| 3 | 12 | 3/8" NC Hex Head Cap Screw x 5/8" Long | 100-038058-273 |
| 4 | 1 | Gasket, Crankcase Cover | 7203-0253-00B |
| 5 | 2 | 3/4" Pipe Plug, Square Head | 170-034001-237 |
| 6 | 1 | Oil Level Dipstick | 7203-0342-00A |
| 7 | 1 | O-Ring, Size #2-110 | 110-000110-201 |
| 8 | 5 | 1/4" Pipe Plug, Socket Head | 170-014003-405 |
| 9 | 1 | Breather, Crankcase, 3/4" NPTM | 7602-3002-10A |
| 10 | 3 | 1/2" Pipe Plug, Socket Head | 170-012003-237 |

| MA-75L, SC-115L | | | |
|-----------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 11 | 5 | Connecting Rod sub-assembly, which includes: | 7203-0104-00D |
| 12 | 1 | Wrist Pin Bushing | 7203-0115-01A |
| 13 | 2 | 3/8" NC x 2-1/2" Long, Socket Head Cap Screw | 100-038212-454 |
| 14 | 2 | 3/8" Reg. Spring Lockwasher | 05454A007 |
| 15 | 5 | Crankpin Bearing Pair | 7203-0160-00K |
| 16 | 5 | Wrist Pin | 7203-0116-00A |
| 17 | 5 | Crosshead | 7203-0105-00C |
| 18 | 5 | Wiper Box | 7203-0108-00C |
| 19 | 10 | 1/2" x 1-1/2" Long, Hex Head Cap Screw | 100-012112-273 |
| 20 | 5 | Polypak Ring | 145-114178-999 |
| 21 | 5 | Oil Seal | 145-114206-999 |
| 22 | 5 | O-Ring | 001500121 |


Power Frame Assembly; Connecting Rod, Crosshead & Wiper Box Assembly

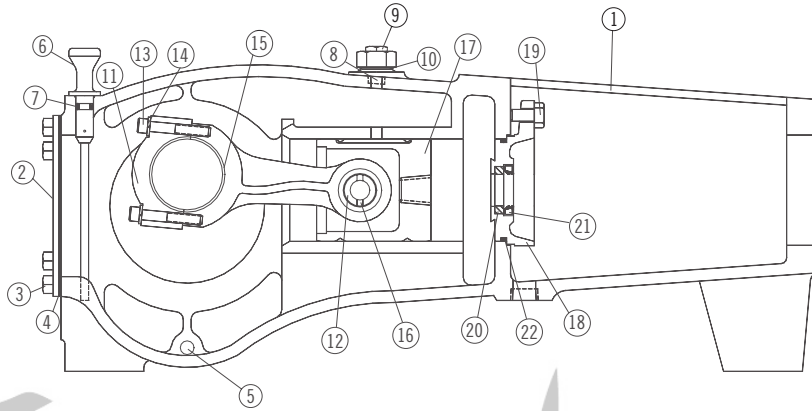

| MA-75H, SC-115, SC-115H | | | |
|-------------------------|----------|--|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Power Frame | 7203-0251-00K |
| 2 | 1 | Crankcase Cover | 7203-0244-00B |
| 3 | 12 | 3/8" NC Hex Head Cap Screw x 5/8" Long | 100-038058-273 |
| 4 | 1 | Gasket, Crankcase Cover | 7203-0253-00B |
| 5 | 2 | Plug, 3/4" Pipe, Square Head Steel | 170-034001-237 |
| 6 | 1 | Oil Level Dipstick | 7203-0342-00A |
| 7 | 1 | O-Ring, Size #2-203 | 110-000110-201 |
| 8 | 5 | 1/4" Pipe Plug, Socket Head | 170-014003-405 |
| 9 | 1 | Breather, Crankcase, 3/4" NPTM | 7602-3002-10A |
| 10 | 3 | 1/2" Pipe Plug, Socket Head | 170-012003-237 |

| MA-75H, SC-115, SC-115H | | | |
|-------------------------|----------|---|--------------------------------|
| Item | Quantity | Description | Part Number |
| 11 | 10 | Connecting Rod sub-assembly, which includes: Wrist Pin Bushing | 7203-0104-00D 7203-0115-01A |
| 12 | 1 | | |
| 13 | 2 | 3/8" NC x 2-1/2" Long, Socket Head Cap Screw | 100-038212-454 |
| 14 | 2 | 3/8" Reg. Spring Lockwasher | 05454A007 |
| 15 | 5 | Crankpin Bearing Pair | 7203-0160-00K |
| 16 | 5 | Wrist Pin | 7203-0116-00A |
| 17 | 5 | Crosshead | 7203-0105-00C |
| 18 | 5 | Wiper Box | 7203-0108-00C |
| 19 | 10 | 1/2" x 1-1/2" Long, Hex Head Cap Screw | 100-012112-273 |
| 20 | 5 | Polypak Ring | 145-114178-999 |
| 21 | 5 | Oil Seal | 145-114206-999 |
| 22 | 5 | O-Ring | 001500121 |

Crankshaft Assembly 2-1/4" Stroke; Right-Hand and Left-Hand Drive; Right-Hand Shown

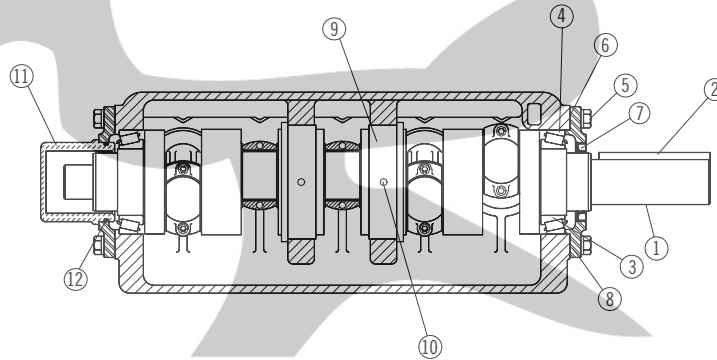


| MA-45M, RO-72 | | | |
|---------------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Crankshaft | 7206-0153-50D |
| 2 | 1 | Drive Key | 146-012314-236 |
| 3 | 2 | Crankshaft Kit (includes items 1, 2, 3 & 4) | PE248KB |
| 4 | 2 | Bearing Cone, Tapered Roller | 203-09624-999 |
| | | Bearing Cup | 202-02624-999 |
| 5 | 12 | 1/2" NC Hex Head Cap Screw 1-1/4" Long | 100-012114-273 |
| 6 | 2 | Shim Set | 7509-0014-50A |

| MA-45M, RO-72 | | | |
|---------------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 7 | 1 | Oil Seal – *See Note Below | 145-234334-999 |
| 8 | 2 | Bearing Retainer | 7206-0007-50B |
| 9 | 2 | Center Bearing | 7206-0051-00B |
| 10 | 2 | 3/8" NC Hex Socket Hd. Dog Point Set Screw x 1.25 | 119-038034-999 |
| 11 | 1 | Extension Guard – *See Note Below | 7203-0176-00A |
| 12 | 1 | O-Ring – *See Note Below | 110-000238-200 |

* **NOTE** – If crankshaft accessory drive extension is to be utilized (for example: to drive a packing lubricator) then omit Item 11, Extension Guard, and also increase the quantity of Item 7, from one required to two. Omit Item 12, O-Ring.


Crankshaft Assembly 2-1/4" Stroke; Right-Hand and Left-Hand Drive; Right-Hand Shown

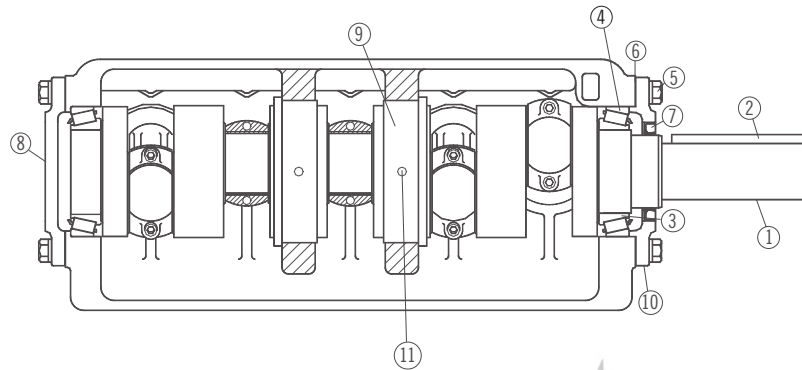

| SC-80, SC-80H | | | |
|---------------|----------|---|---------------------------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Crankshaft Assembly (includes items 1 & 2) | PE250K |
| 2 | 1 | Crankshaft, 2-1/4" Stroke Drive Key | 7206-0074-50D 146-012314-236 |
| 3 | 2 | Crankshaft Kit (includes items 1, 2, 3 & 4) | PE250KB |
| 4 | 2 | Bearing Cone, Tapered Roller | 203-09624-999 |
| 5 | 12 | Bearing Cup | 202-02624-999 |
| | | 1/2" NC Hex Head Cap Screw 1-1/4" Long | 100-012114-273 |

| SC-80, SC-80H | | | |
|---------------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 6 | 2 | Shim Set | 7509-0014-50A |
| 7 | 1 | Oil Seal | 145-234334-999 |
| 8 | 2 | Bearing Cup Retainer | 7206-0007-50B |
| 9 | 2 | Center Bearing | 7206-0051-00B |
| 10 | 2 | 3/8" NC Hex Socket Hd. Half Dog Point Set Screw | 119-038034-999 |
| 11 | 1 | Plug | 7206-0064-00A |


Crankshaft Assembly 2-3/4" Stroke; Right-Hand and Left-Hand Drive; Right-Hand Shown

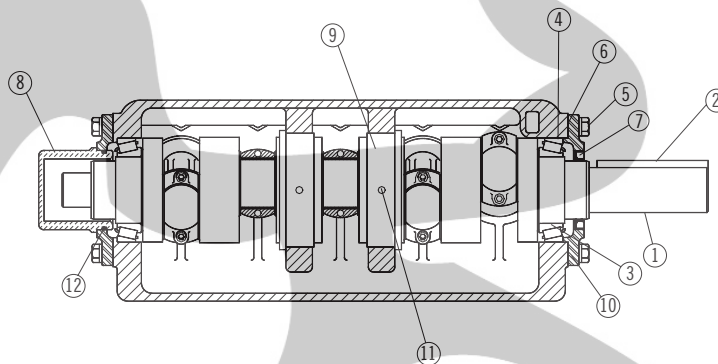

| MA-75L, MA-75M, MA-75H | | | |
|------------------------|----------|---|---------------------------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Crankshaft Assembly (includes items 1 & 2) | PE318K |
| 2 | 1 | Crankshaft, 2-3/4" Stroke Drive Key | 7203-0448-00D 146-058512-236 |
| 3 | 2 | Crankshaft Kit (includes items 1, 2, 3 & 4) | PE318KB |
| 4 | 2 | Bearing Cone, Tapered Roller | 203-947000-999 |
| 5 | 12 | Bearing Cup | 202-247000-999 |
| | | 1/2" NC Hex Head Cap Screw 1-1/2" Long | 100-012112-273 |

| MA-75L, MA-75M, MA-75H | | | |
|------------------------|----------|-------------------------------|----------------|
| Item | Quantity | Description | Part Number |
| 6 | 2 | Shim Set | 7509-0013-00A |
| 7 | 2 | Oil Seal | 145-278334-999 |
| 8 | 1 | Cover, Crankshaft Extension | 7206-0176-0007 |
| 9 | 2 | Center Bearing | 7203-0243-00B |
| 10 | 2 | Bearing Retainer | 7203-0109-00B |
| 11 | 2 | 3/8" NC Set Screw x 3/4" Long | 119-038034-999 |
| 12 | 1 | O-Ring | 110-000238-200 |


Crankshaft Assembly 2-3/4" Stroke; Right-Hand and Left-Hand Drive; Right-Hand Shown

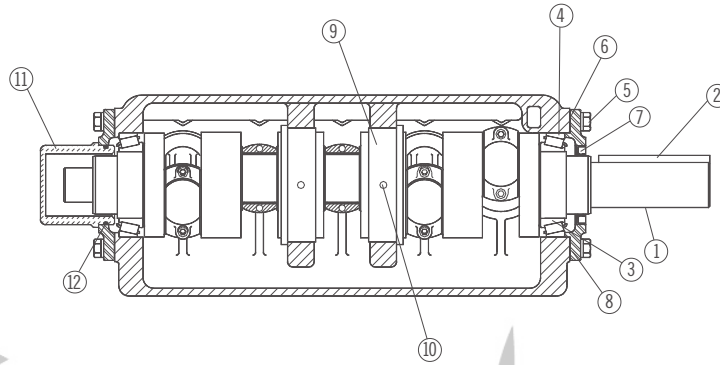

| SC-115L, SC-115, SC-115H, RO-117 | | | |
|----------------------------------|----------|---|---------------------------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Crankshaft Assembly (includes items 1 & 2) | PE155K |
| 2 | 1 | Crankshaft, 2-3/4" Stroke Drive Key | 7203-0250-00D 146-058512-236 |
| 3 | 2 | Crankshaft Kit (includes items 1, 2, 3 & 4) | PE155KB |
| 4 | 2 | Bearing Cone, Tapered Roller | 203-947000-999 |
| 5 | 2 | Bearing Cup | 202-247000-999 |
| 5 | 12 | 1/2" NC Hex Head Cap Screw 1-1/2" Long | 100-012112-273 |

| SC-115L, SC-115, SC-115H, RO-117 | | | |
|----------------------------------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 6 | 2 | Shim Set | 7509-0013-00A |
| 7 | 1 | Oil Seal | 145-278334-999 |
| 8 | 1 | Bearing Retainer, Blind | 7203-0155-01C |
| 9 | 2 | Center Bearing | 7203-0243-00B |
| 10 | 1 | Bearing Retainer | 7203-0109-00B |
| 11 | 2 | 3/8" NC Hex Socket Hd. Half Dog Point Set Screw | 119-038034-999 |
| 12 | 1 | O-Ring | 110-000238-200 |


Crankshaft Assembly 2-3/4" Stroke; Auburn Planetary #8

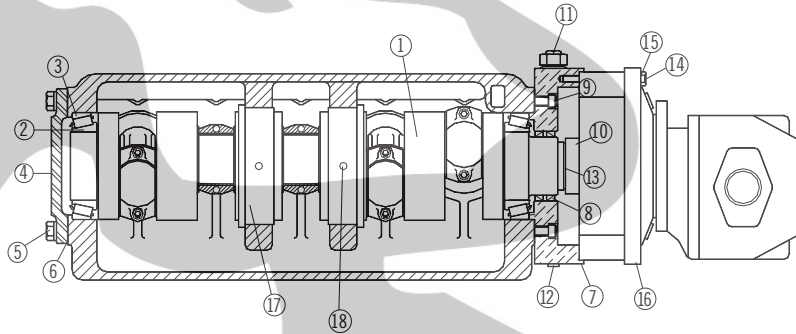

| SC-115 | | | | |
|--------|----------|---|---------------------------------|---------------------------------|
| Item | Quantity | Description | L.H. Drive Part Numbers | R.H. Drive Part Numbers |
| 1 | 1 | Crankshaft Assembly (includes items 1, 10 & 13) | PE262K | PE221K |
| 10 | 1 | Crankshaft | 7203-0524-00A | 7203-0468-00A |
| 13 | 1 | Planetary Output Shaft Snap Ring | 7203-0525-00A 226-000237-999 | 7203-0466-00A 226-000237-999 |
| | | Crankshaft Kit (includes items 1, 2, 3, 10 & 13) | PE262KB | PE221KB |
| 2 | 2 | Bearing Cone, Tapered Roller | 203-947000-999 | 203-947000-999 |
| 3 | 2 | Bearing Cup | 202-247000-999 | 202-247000-999 |
| 4 | 1 | Blind Bearing Retainer | 7203-0155-01C | 7203-0155-01C |
| 5 | 6 | 1/2" NC Hex Head Cap Screws x 1-1/2" Long | 100-012112-273 | 100-012112-273 |
| 6 | 1 | Shim Set | 7509-0013-00A | 7509-0013-00A |
| 7 | 1 | Bearing Retainer | 7203-0469-00B | 7203-0469-00B |
| 8 | 2 | Oil Seal | 145-278334-999 | 145-278334-999 |

| SC-115 | | | | |
|--------|----------|---|----------------------------|----------------------------|
| Item | Quantity | Description | L.H. Drive Part Numbers | R.H. Drive Part Numbers |
| 9 | 6 | 1/2" NC Socket Head Cap Screw x 1-3/4" Long | 105-012134-273 | 105-012134-273 |
| 10 | 1 | (listed above with crankshaft assembly) | | |
| 11 | 1 | Breather Filter | 7602-3002-10A | 7602-3002-10A |
| 12 | 2 | 1/4" NPT Pipe Plug | 170-014002-405 | 170-014002-405 |
| 13 | 1 | (listed above with crankshaft assembly) | | |
| 14 | 12 | 3/8" NC Hex Head Cap Screw x 3-1/4" Long | 100-038312-454 | 100-038314-454 |
| 15 | 12 | 3/8" Washer "Stat-O-Seal" | 156-038068-999 | 156-038068-999 |
| 16 | 1 | Auburn Gear #8 Kit | RTF | RTF |
| 17 | 2 | Center Bearing | 7203-0243-00B | 7203-0243-00B |
| 18 | 2 | 3/8" NC Hex Socket Hd. Set Screw x 1-1/2" | 119-038034-999 | 119-038034-999 |

Crankshaft Assembly 2-3/4" Stroke; Auburn Planetary Gear #6

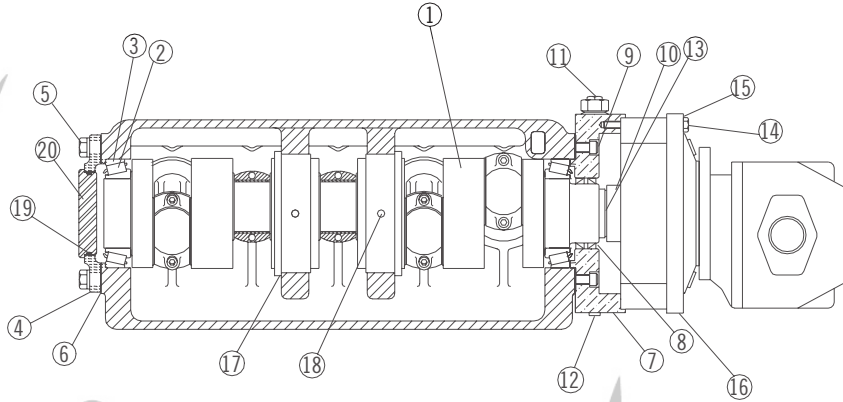


| SC-115L, SC-115 | | | |
|-----------------|----------|---|-------------------------|
| Item | Quantity | Description | L.H. Drive Part Numbers |
| 1 | 1 | Crankshaft Assembly (includes items 1, 10 & 13) | PE266K |
| 10 | 1 | Crankshaft | 7203-0540-00A |
| 13 | 1 | Planetary Output Shaft | 7203-0504-00A |
| | | Snap Ring | 226-000225-999 |
| 2 | 2 | Crankshaft Kit (includes items 1, 2, 3, 10 & 13) | PE266KB |
| 3 | 2 | Bearing Cone, Tapered Roller | 203-947000-999 |
| | | Bearing Cup | 202-247000-999 |
| 4 | 1 | Bearing Retainer | 7203-0155-01C |
| 5 | 6 | 1/2" NC Hex Head Cap Screws x 1-1/2" Long | 100-012112-273 |
| 6 | 1 | Shim Set | 7509-0013-00A |
| 7 | 1 | Bearing Retainer | 7203-0454-00B |
| 8 | 2 | Oil Seal | 145-234334-999 |

| SC-115L, SC-115 | | | |
|-----------------|----------|---|-------------------------|
| Item | Quantity | Description | L.H. Drive Part Numbers |
| 9 | 6 | 1/2" NC Socket Head Cap Screw x 2" Long | 105-012200-273 |
| 10 | 1 | (listed above with the crankshaft assembly) | |
| 11 | 1 | Breather Filter | 7602-3002-10A |
| 12 | 2 | 1/4" NPT Pipe Plug | 170-014002-405 |
| 13 | 1 | (listed above with the crankshaft assembly) | |
| 14 | 12 | 5/16" NC Hex Head Cap Screw x 3-1/4" Long | 100-516314-454 |
| 15 | 12 | 5/16" Washer "Stat-O-Seal" | 156-516062-999 |
| 16 | 1 | Auburn Gear #6 Kit 3.75:1 | 7203-0505-00A |
| 17 | 2 | Center Bearing | 7203-0243-00B |
| 18 | 2 | 3/8" NC Hex Socket Hd. Set Screw x 1-1/2" | 119-038034-999 |
| 19 | 1 | Frame Plug | 7206-0064-00A |
| 20 | 1 | O-Ring | 110-000238-201 |

BUCKHORN PUMPS, INC.


Fluid End Assembly

| MA-45M, SC-80, RO-72 | | | |
|----------------------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End, Nickel Aluminum Bronze | 7206-0058-00E |
| 2 | 2 | 3/4" NC Socket Head Cap Screw x 2" Long | 271-034200-271 |
| 3 | 10 | Valve Cover & Cyl. Head Plug | 7206-0018-10A |
| 4 | 10 | 3/8" NC Hex Head Cap Screw x 1-1/4" Long | 100-038114-273 |
| 5 | 2 | Retainer Plate, Valve Cover & Cylinder Head | 7206-0056-00C |
| 6 | 10 | Fluid Seal, Nitrile Rubber | 7206-0016-00A |
| 7 | 12 | 5/8" NC Hex Head Cap Screw x 2-3/4" Long | 100-058234-273 |
| 8 | 10 | 5/8" NC Hex Head Cap Screw x 7-1/2" Long | 100-058712-273 |
| 9 | 1 | Retainer Plate, Stuffing Box | 7206-0055-00C |
| 10 | 2 | Screw, Cap; Hex Head, 3/8" NC x 1-3/4" Long | 100-038134-273 |
| 11 | 2 | Stud, Powerframe to Liquid End | 7206-0052-00B |
| 12 | 4 | 5/8" NC Heavy Hex Nut | 127-058011-243 |

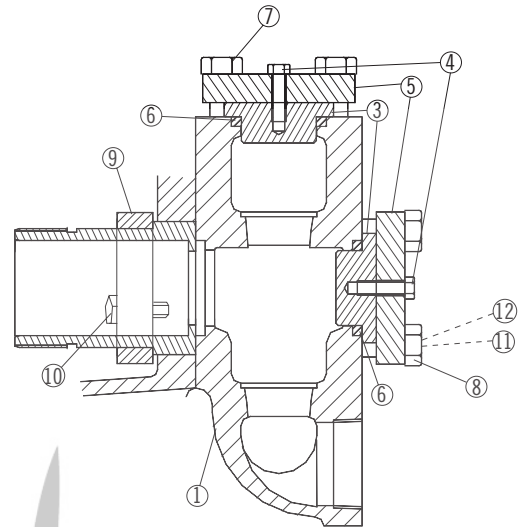


Fluid End Assembly

| MA-75L | | | |
|--------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End, Ductile Iron | 7203-0533-00D |
| 2 | 2 | 7/8" NC Socket Head Cap Screw x 2-3/4" Long | 271-078234-271 |
| 3 | 10 | Valve Cover & Cyl. Head Plug | 7203-0565-00B |
| 4 | 8 | 1/2" NC Hex Head Cap Screw x 1-1/4" Long | 100-012114-273 |
| 5 | 2 | Retainer Plate, Valve Cover & Cylinder Head | 7203-0242-00B |
| 6 | 10 | Fluid Seal, Nitrile Rubber | 7202-0041-00A |
| 7 | 12 | 3/4" NC Hex Head Cap Screw x 2" Long | 100-034200-273 |
| 8 | 10 | 3/4" NC Hex Head Cap Screw x 9-1/2" Long | 100-034912-273 |
| 9 | 1 | Retainer Plate, Stuffing Box | 7203-0323-00B |
| 10 | 2 | 1/2" NC Hex Head Cap Screw x 1-1/2" Long | 100-012112-273 |
| 11 | 2 | Stud, Powerframe to Liquid End | 7203-0566-00B |
| 12 | 4 | 3/4" NC Heavy Hex Nut | 127-034010-243 |

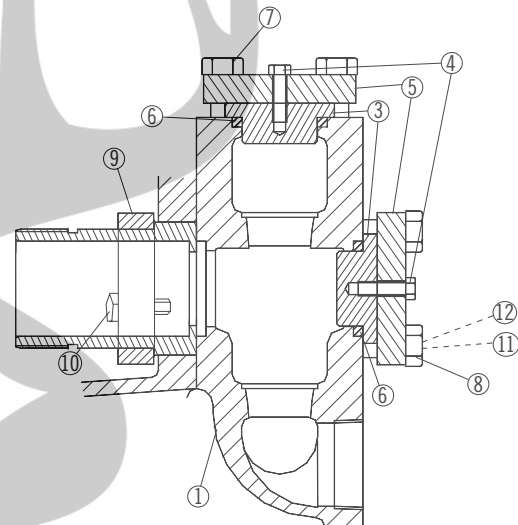


Fluid End Assembly

| MA-75M, SC-115, RO-117 | | | |
|------------------------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End, Nickel Aluminum Bronze | 7203-0249-00E |
| 2 | 2 | 7/8" NC Socket Head Cap Screw x 2-3/4" Long | 271-078234-271 |
| 3 | 10 | Valve Cover & Cyl. Head Plug | 7203-0119-20A |
| 4 | 10 | 1/2" NC Hex Head Cap Screw x 1-1/4" Long | 100-012114-273 |
| 5 | 2 | Retainer Plate, Valve Cover & Cylinder Head | 7203-0242-00B |
| 6 | 10 | Fluid Seal, Nitrile Rubber | 7203-0118-00A |
| 7 | 4 | 3/4" NC Hex Head Cap Screw x 3" Long | 100-034300-273 |
| 8 | 10 | 3/4" NC Hex Head Cap Screw x 9" Long | 100-034900-273 |
| 9 | 1 | Retainer Plate, Stuffing Box | 7203-0245-00B |
| 10 | 2 | 5/8" NC Hex Head Cap Screw x 2" Long | 100-058200-273 |
| 11 | 2 | Stud, Powerframe to Liquid End | 7203-0246-00B |
| 12 | 4 | 3/4" NC Heavy Hex Nut | 127-034010-243 |
| 13 | 8 | 3/4" NC Hex Head Cap Screw x 3-1/2" Long | 100-034312-273 |

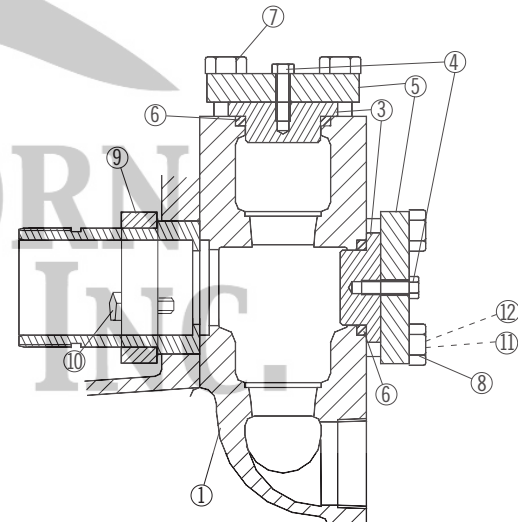


Side Suction Fluid End Assembly

| SC-115L | | | |
|---------|----------|---|----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End, Ductile Iron | 7203-0533-00D |
| 2 | 2 | 7/8" NC Socket Head Cap Screw x 2-3/4" Long | 271-078234-271 |
| 3 | 10 | Valve Cover & Cyl. Head Plug | 7203-0565-00B |
| 4 | 10 | 1/2" NC Hex Head Cap Screw x 1-1/4" Long | 100-012114-273 |
| 5 | 2 | Retainer Plate, Valve Cover & Cylinder Head | 7203-0242-00B |
| 6 | 10 | Fluid Seal, O-Ring | 7202-0041-00A |
| 7 | 4 | 3/4" NC Hex Head Cap Screw x 2-1/2" Long | 100-034200-273 |
| 8 | 10 | 3/4" NC Hex Head Cap Screw x 9-1/2" Long | 100-034912-273 |
| 9 | 1 | Retainer Plate, Stuffing Box | 7203-0323-00B |
| 10 | 2 | 5/8" NC Hex Head Cap Screw x 2-1/4" Long | 100-058214-273 |
| 11 | 2 | Stud, Power Frame to Fluid End (not shown) | 7203-0246-00B |
| 12 | 4 | 3/4" Heavy Hex Nut (not shown) | 127-034010-243 |
| 13 | 8 | 3/4" NC Hex Hd. Cap Screw x 4" Long (not shown) | 100-034400-273 |

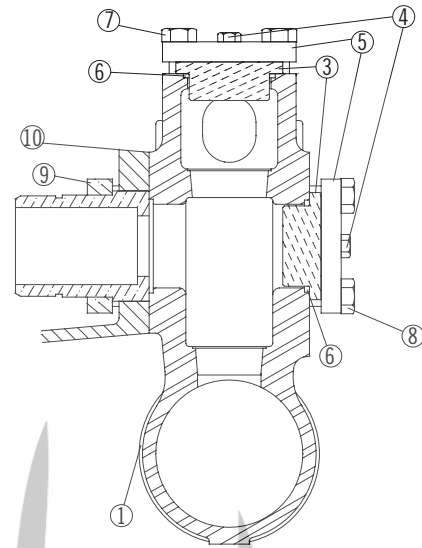


Fluid End Assembly

| MA-45 | | | |
|-------|----------|---|-----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End | Consult Factory |
| 2 | 2 | 3/4" NC Socket Head Cap Screw x 5-1/2" long | 271-034512-271 |
| 3 | 10 | Valve Cover & Cyl. Head Plug | 7206-0018-10A |
| 4 | 10 | 3/8" NC Hex Head Cap Screw x 1-1/4" long | 100-038114-273 |
| 5 | 2 | Retainer Plate, Valve Cover & Cylinder Head | 7206-0056-00C |
| 6 | 10 | Fluid Seal, Nitrile Rubber | 7206-0016-00A |
| 7 | 12 | 5/8" NC Hex Head Cap Screw x 2" long | 100-058200-273 |
| 8 | 10 | 5/8" NC Hex Head Cap Screw x 8-1/2" long | 100-058812-273 |
| 9 | 1 | Retainer Plate, Stuffing Box | 7206-0055-00C |
| 10 | 2 | 3/8" NC Hex Head Cap Screw x 1-1/2" long | 100-038112-273 |
| 11 | 2 | Stud, Powerframe to Liquid End | 7206-0230-00B |
| 12 | 4 | 5/8" NC Heavy Hex Nut | 133-012013-243 |

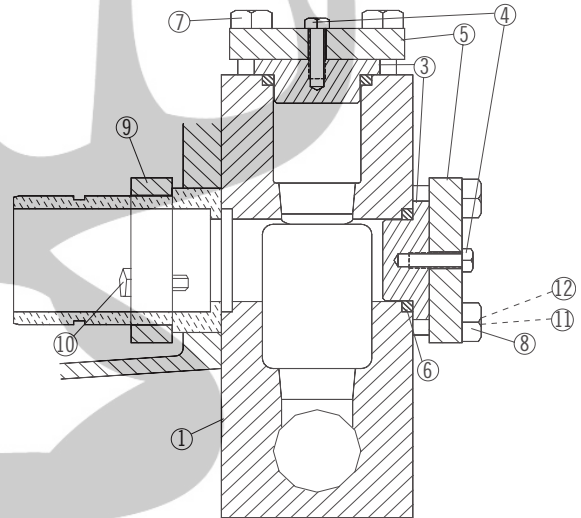


Fluid End Assembly

| R0-72 | | | |
|-------|----------|---|-----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End | Consult Factory |
| 2 | 2 | 3/4" NC Socket Head Cap Screw x 4-1/2" long | 271-034412-271 |
| 3 | 5 | Cyl. Head Plug | 7206-0018-10A |
| 4 | 5 | Valve Cover Plug | 7203-0119-20A |
| 5 | 1 | Retainer Plate, Cylinder Head | 7206-0056-00C |
| 5A | 1 | Retainer Plate, Valve Cover | 7206-0310-00B |
| 6 | 5 | 3/8" NC Hex Head Cap Screw x 1-1/4" | 100-038114-273 |
| 6A | 5 | 1/2" NC Hex Head Cap Screw x 1-1/4" | 100-012114-273 |
| 7 | 5 | Seal, Fluid, Nitrile | 7206-0016-00A |
| 8 | 5 | Seal, Fluid, Nitrile | 7203-0118-00A |
| 9 | 12 | 5/8" NC Hex Head Cap Screw x 2" long | 100-058200-273 |
| 10 | 10 | 5/8" NC Hex Head Cap Screw x 7-1/2" | 100-058712-273 |
| 11 | 4 | 5/8" NC Hex Nut | 133-058011-243 |
| 12 | 2 | Stud, Powerframe to Liquid End | 7206-0052-00B |
| 13 | 1 | Plate, Stuffing Box Retainer | 7206-0055-00C |
| 14 | 2 | 1/2" NC Hex Head Cap Screw x 1-1/4" | 100-012114-273 |

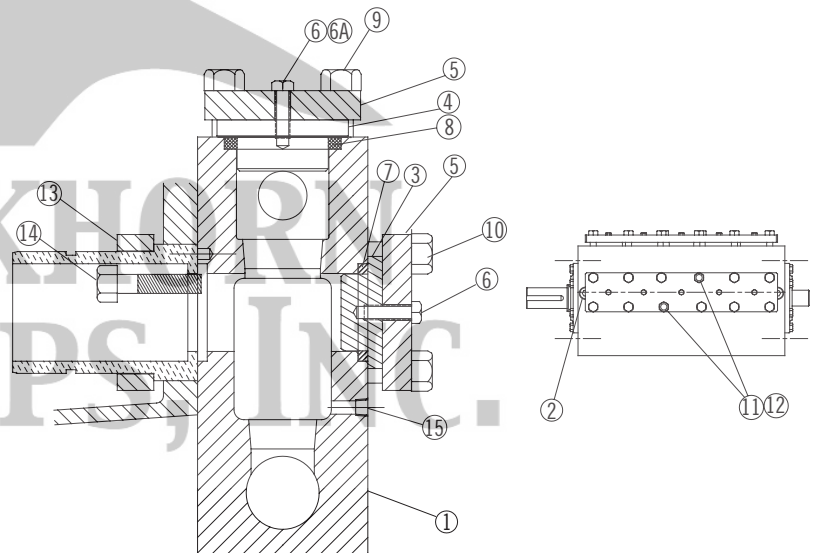


Fluid End Assembly

| MA-75L | | | |
|--------|----------|---|-----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End | Consult Factory |
| 2 | 2 | 7/8" NC Socket Head Cap Screw x 5-3/4" long | 271-078534-271 |
| 3 | 5 | Cyl. Head Plug, Stainless Steel | 7203-0565-00A |
| 4 | 5 | Valve Cover Plug, Stainless Steel | 7203-0565-00A |
| 5 | 2 | Retainer Plate, Cylinder and Valve Cover | 7203-0242-00B |
| 6 | 10 | 1/2" NC Hex Head Cap Screw x 1-1/4" | 100-012114-273 |
| 7 | 5 | Seal, Fluid; Nitrile | 7202-0041-00A |
| 8 | 5 | Seal, Fluid; Nitrile | 7202-0041-00A |
| 9 | 12 | 3/4" NC Hex Head Cap Screw x 2" long | 100-034200-273 |
| 10 | 10 | 3/4" NC Hex Head Cap Screw x 9" | 100-034900-273 |
| 11 | 4 | 3/4" NC Hex Nut | 127-034010-243 |
| 12 | 2 | Stud, Powerframe to Liquid End | 7203-0246-00B |
| 13 | 1 | Plate, Stuffing Box Retainer | 7203-0245-00B |
| 14 | 2 | 5/8" NC Hex Head Cap Screw x 2" | 310-058200-454 |

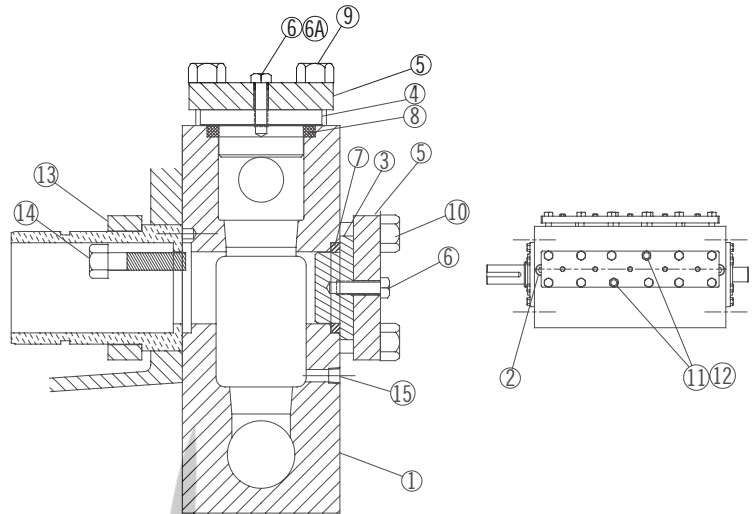


Fluid End Assembly

| MA-75M, RO-117 | | | |
|----------------|----------|---|-----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End | Consult Factory |
| 2 | 2 | 7/8" NC Socket Head Cap Screw x 5-3/4" Long | 271-078534-271 |
| 3 | 5 | Cyl. Head Plug | 7203-0119-00A |
| 4 | 5 | Valve Cover Plug | 7203-0636-00A |
| 5 | 2 | Retainer Plate, Cylinder and Valve Cover | 7203-0242-00B |
| 6 | 8 | 1/2" NC Hex Head Cap Screw x 1-1/4" | 100-012114-273 |
| 6A | 2 | 1/2" NC Hex Head Cap Screw x 1-1/2" | 100-012112-273 |
| 7 | 5 | Seal, Fluid; Nitrile | 7203-0118-00A |
| 8 | 5 | Seal, Fluid; Nitrile | 7202-0012-00A |
| 9 | 12 | 3/4" NC Hex Head Cap Screw x 2" Long | 100-034200-273 |
| 10 | 10 | 3/4" NC Hex Head Cap Screw x 9" | 100-034900-273 |
| 11 | 4 | 3/4" NC Hex Nut | 127-034010-243 |
| 12 | 2 | Stud, Power Frame to Liquid End | 7203-0246-00B |
| 13 | 1 | Plate, Stuffing Box Retainer | 7203-0245-00B |
| 14 | 2 | 5/8" NC Hex Head Cap Screw x 2" | 100-058200-273 |

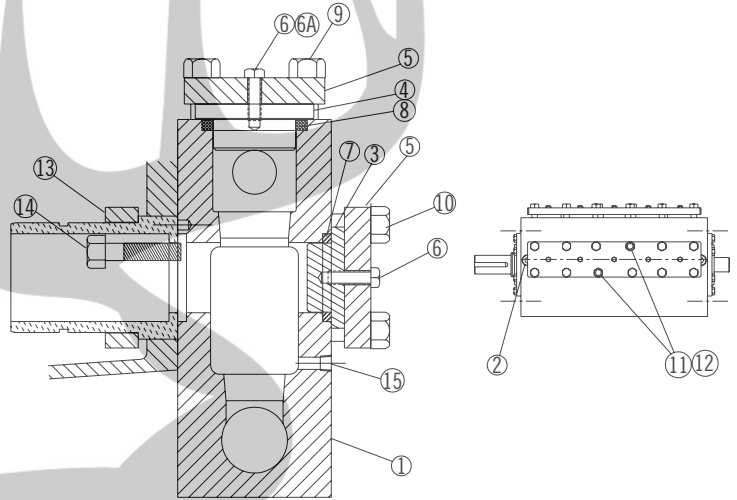


Fluid End Assembly

| MA-75H | | | |
|--------|----------|---|-----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End | Consult Factory |
| 2 | 2 | 7/8" NC Socket Head Cap Screw x 5-3/4" Long | 271-078534-271 |
| 3 | 5 | Cyl. Head Plug | 7203-0119-20A |
| 4 | 5 | Valve Cover Plug | 7203-0709-20A |
| 5 | 1 | Retainer Plate, Valve Cover | 7203-0654-00B |
| 5A | 1 | Retainer Plate, Cylinder Head | 7203-0242-00B |
| 6 | 8 | 1/2" NC Hex Head Cap Screw x 1-1/2" | 100-012112-273 |
| 6A | 2 | 1/2" NC Hex Head Cap Screw x 1-3/4" | 100-012134-273 |
| 7 | 5 | Seal, Fluid; Nitrile | 7207-0022-00A |
| 8 | 5 | Seal, Fluid; Nitrile | 7203-0118-00A |
| 9 | 12 | 1" NC Hex Head Cap Screw x 3" Long | 100-100300-273 |
| 10 | 10 | 3/4" NC Hex Head Cap Screw x 9" | 100-034900-273 |
| 11 | 4 | 3/4" NC Hex Nut | 127-034010-243 |
| 12 | 2 | Stud, Power Frame to Liquid End | 7203-0566-00B |
| 13 | 1 | Plate, Stuffing Box Retainer | 7203-0245-00B |
| 14 | 2 | 5/8" NC Hex Head Cap Screw x 2" | 100-058200-273 |
| 15 | 5 | 3/4" Pipe Plug | 170-034002-405 |

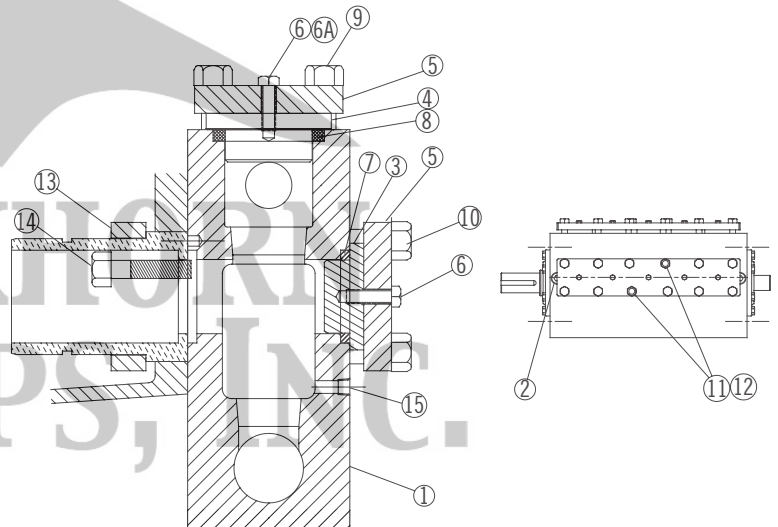


Fluid End Assembly

| SC-80H | | | |
|--------|----------|--|-----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End | Consult Factory |
| 2 | 2 | 3/4" NC Hex Head Cap Screw x 5-1/2" Long | 100-034512-273 |
| 3 | 5 | Valve Cover Plug | 7206-0018-10A |
| 4 | 5 | 3/8" NC Hex Head Cap Screw x 1-1/4" Long | 100-038114-273 |
| 5 | 1 | Retainer Plate, Valve Cover | 7206-0266-00B |
| 6 | 5 | Fluid Seal, Nitrile Rubber | 7206-0016-00A |
| 7 | 12 | 7/8" NC Hex Head Cap Screw x 2-1/2" Long | 100-078212-273 |
| 8 | 10 | 5/8" NC Hex Head Cap Screw x 7-1/2" Long | 100-058712-273 |
| 9 | 1 | Retainer Plate, Stuffing Boxes | 7206-0055-00C |
| 10 | 2 | 3/8" NC Hex Head Cap Screw x 1-1/2" Long | 100-038112-273 |
| 11 | 2 | Stud, Fluid End to Power End | 7206-0428-00B |
| 12 | 2 | Nut, Heavy Hex, 1/2" NC | 133-012013-243 |

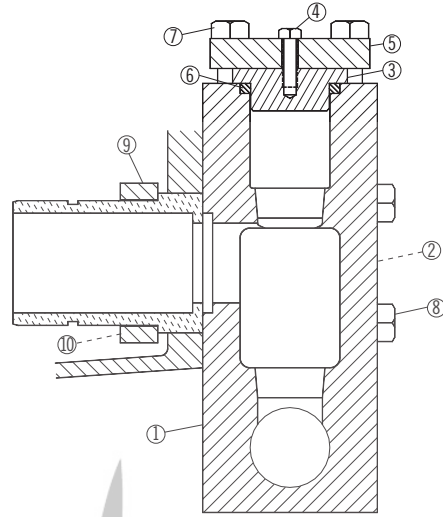


Fluid End Assembly

| SC-115H | | | |
|---------|----------|---|-----------------|
| Item | Quantity | Description | Part Number |
| 1 | 1 | Fluid End | Consult Factory |
| 2 | 2 | 7/8" NC Socket Head Cap Screw x 7" Long | 100-078700-273 |
| 3 | 5 | Valve Cover & Cyl. Head Plug | 7203-0119-00A |
| 4 | 5 | 1/2" NC Hex Head Cap Screw x 1-1/2" Long | 100-012112-273 |
| 5 | 1 | Retainer Plate, Valve Cover & Cylinder Head | 7203-0654-00B |
| 6 | 5 | Fluid Seal, Nitrile Rubber | 7203-0118-00A |
| 7 | 12 | 1" NC Hex Head Cap Screw x 3" Long | 100-100300-273 |
| 8 | 10 | 3/4" NC Hex Head Cap Screw x 8" Long | 100-034800-00 |
| 9 | 1 | Retainer Plate, Stuffing Box | 7203-0245-00B |
| 10 | 2 | 5/8" NC Hex Head Cap Screw x 2-1/4" Long | 100-058114-273 |
| 11 | 1 | 1/4" Hex Head Pipe Plug | 170-014002-237 |
| 12 | 4 | Nut, 3/4" NC | 127-034010-243 |
| 13 | 2 | Stud, Fluid End to Power End | 7203-0246-00B |

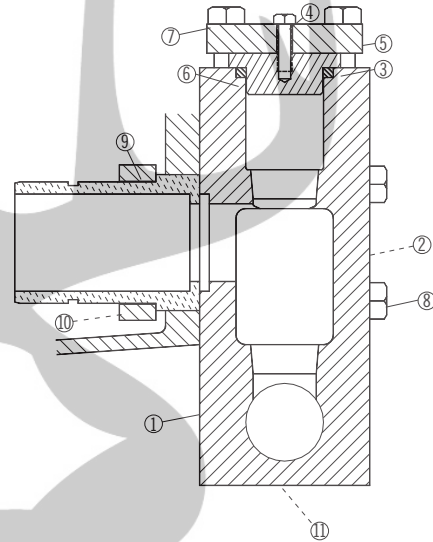

BUCKHORN PUMPS, INC.

Stuffing Box Assembly

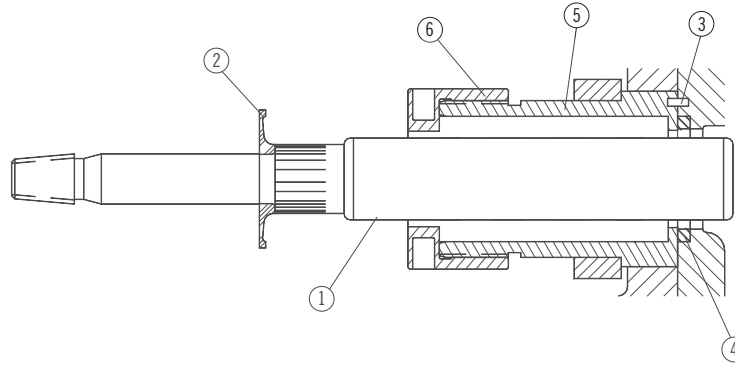


Qty. 5 per pump ea.

| MA-45M, SC-80, SC-80H, RO-72 | | | | | | |
|------------------------------|----------------------------|---------------|----------------|--|---------------------------|--------------------|
| Plunger Diameter | Plunger, Chrome-Oxide (#1) | Baffle (#2) | Roll Pin (#3) | Stuffing Box Seal, Nitrile Rubber (#4) | Stuffing Box **Steel (#5) | Gland **Steel (#6) |
| 1-7/8" | 7206-0023-15B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0025-00A | 7206-0012-00A |
| 1-3/4" | 7206-0023-14B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0025-00A | 7206-0012-00A |
| 1-5/8" | 7206-0023-13B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0025-00A | 7206-0012-00A |
| 1-1/2" | 7206-0023-12B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0025-00A | 7206-0012-00A |
| 1-3/8" | 7206-0023-11B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0026-02A | 7206-0013-00A |
| 1-1/4" | 7206-0023-10B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0026-02A | 7206-0013-00A |
| 1-1/8" | 7206-0023-09B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0027-00A | 7206-0011-00B |
| 1" | 7206-0023-08B | 7206-0015-00A | 149-014058-999 | 7206-0016-00A | 7206-0027-00A | 7206-0011-00B |
| 7/8" | 7206-0023-07B | 7206-0015-00A | 149-014058-999 | 110-000320-201 | 7206-0028-00A | 7206-0014-00B |

* NOTE: 1" and 7/8" pumps have a separate Extension Rod (#7206-0024-00A). RO pumps do not use Steel.

** For both Stuffing Box and Gland use the following: Nickel Aluminum Bronze: xxxx-xxxx-01A; 316 Stainless Steel: xxxx-xxxx-03A; 2205 Duplex Stainless Steel: xxxx-xxxx-04A. GLAND NUT WRENCH 7206-0086-00B

Stuffing Box Assembly

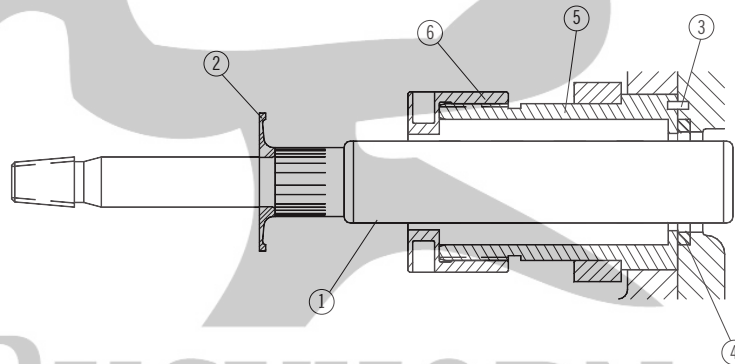


Qty. 5 per pump ea.

| MA-75L, SC-115L | | | | | | |
|------------------|-----------------------------|---------------|----------------|--|---------------------------|--------------------|
| Plunger Diameter | Plunger, Chrome-Oxide (#1)* | Baffle (#2) | Roll Pin (#3) | Stuffing Box Seal, Nitrile Rubber (#4) | Stuffing Box **Steel (#5) | Gland **Steel (#6) |
| 2-3/4" | 7203-0113-22B | 7203-0117-00A | 149-014058-999 | 7202-0041-00A | 7203-0289-02B | 7203-0290-02B |
| 2-5/8" | 7203-0113-21B | 7203-0117-00A | 149-014058-999 | 7202-0041-00A | 7203-0289-02B | 7203-0290-02B |
| 2-1/2" | 7203-0113-20B | 7203-0117-00A | 149-014058-999 | 7202-0041-00A | 7203-0552-02B | 7203-0534-02B |
| 2-3/8" | 7203-0113-19B | 7203-0117-00A | 149-014058-999 | 7202-0041-00A | 7203-0552-02B | 7203-0534-02B |
| 2-1/4" | 7203-0113-18B | 7203-0117-00A | 149-014058-999 | 7202-0041-00A | 7203-0755-02B | 7202-0180-02B |

* NOTE: For TX plunger use 7203-0530-xxB (for abrasive service).

** For both Stuffing Box and Gland use the following: Nickel Aluminum Bronze: xxxx-xxxx-01; 316 Stainless Steel: xxxx-xxxx-03; 2205 Duplex Stainless Steel: xxxx-xxxx-04. GLAND NUT WRENCH 7202-0399-00B

Stuffing Box Assembly

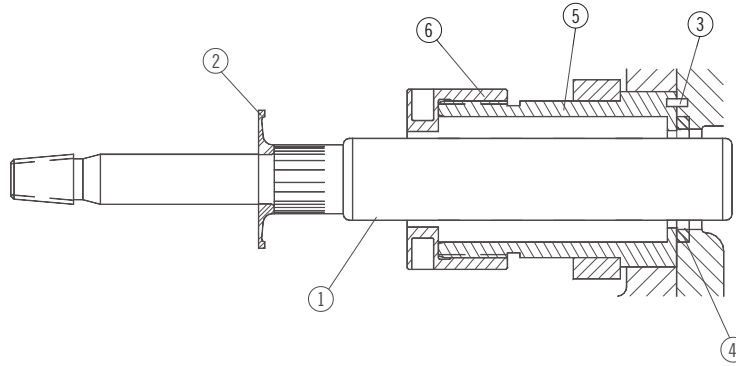


Qty. 5 per pump ea.

| MA-75M, SC-115, RO-117 | | | | | | |
|------------------------|-----------------------------|---------------|----------------|--|-----------------------------|--------------------------|
| Plunger Diameter | Plunger, Chrome-Oxide (#1)* | Baffle (#2) | Roll Pin (#3) | Stuffing Box Seal, Nitrile Rubber (#4) | Stuffing Box **Ductile (#5) | Gland Nut **Ductile (#6) |
| 2-1/4" | 7203-0113-18B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0111-00A | 7202-0180-00B |
| 2-1/8" | 7203-0113-17B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0111-00A | 7202-0180-00B |
| 2" | 7203-0113-16B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0111-00A | 7202-0180-00B |
| 1-7/8" | 7203-0113-15B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0111-00A | 7202-0180-00B |
| 1-3/4" | 7203-0113-14B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0111-00A | 7202-0180-00B |
| 1-5/8" | 7203-0113-13B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0133-00A | 7202-0179-00B |
| 1-1/2" | 7203-0113-12B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0133-00A | 7202-0179-00B |
| 1-3/8" | 7203-0113-11B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0134-00A | 7202-0178-00B |

* NOTE: For TX plunger use 7203-0530-xxB (for abrasive service). RO pumps do not use Steel.

** For both Stuffing Box and Gland use the following: Nickel Aluminum Bronze: xxxx-xxxx-01X; 316 Stainless Steel: xxxx-xxxx-03X; 2205 Duplex Stainless Steel: xxxx-xxxx-04X. GLAND NUT WRENCH 7202-0399-00B.

Stuffing Box Assembly

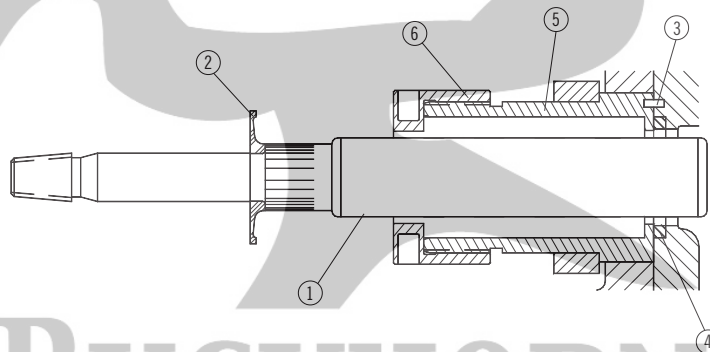

Qty. 5 per pump ea.

| MA-75H, SC-115H | | | | | | |
|------------------|----------------------------|---------------|----------------|--|-----------------------------|--------------------|
| Plunger Diameter | Plunger, Chrome-Oxide (#1) | Baffle (#2) | Roll Pin (#3) | Stuffing Box Seal, Nitrile Rubber (#4) | Stuffing Box **Ductile (#5) | Gland **Steel (#6) |
| 1-5/8" | 7203-0113-13A | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0133-00A | 7202-0179-00B |
| 1-1/2" | 7203-0113-12B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0133-00B | 7202-0179-00B |
| 1-3/8" | 7203-0113-11B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0134-03A | 7202-0178-00B |
| 1-1/4" | 7203-0113-10B | 7203-0117-00A | 149-014058-999 | 7203-0118-00A | 7203-0134-03A | 7202-0178-00B |
| 1-1/8" | 7203-0112-09A | 7203-0117-00A | 149-014058-999 | 7207-0022-00A | 7203-0136-02A | 7203-0149-00B |
| 1" | 7203-0112-08B | 7203-0117-00A | 149-014058-999 | 7207-0022-00A | 7203-0136-02A | 7203-0149-00B |
| 7/8" | 7203-0112-07B | 7203-0117-00A | 149-014058-999 | 7207-0022-00A | 7203-0443-02A | 7203-0149-00B |

NOTE: Plungers with a 1-1/4" diameter and under need a separate extension rod (7203-0114-00A).

* Various materials available – contact factory. **GLAND NUT WRENCH 7202-0399-00B.



THIS PAGE INTENTIONALLY LEFT BLANK

**BUCKHORN
PUMPS, INC.**



THIS PAGE INTENTIONALLY LEFT BLANK

**BUCKHORN
PUMPS, INC.**



THIS PAGE INTENTIONALLY LEFT BLANK

**BUCKHORN
PUMPS, INC.**

STANDARD LIMITED WARRANTY CENTRIFUGAL & RECIPROCATING PUMPS

Pentair Myers® warrants its products against defects in material and workmanship for a period of 12 months from the date of shipment from Pentair Myers or 18 months from the manufacturing date, whichever occurs first – provided that such products are used in compliance with the requirements of the Pentair Myers catalog and technical manuals.

During the warranty period and subject to the conditions set forth, Pentair Myers, at its discretion, will repair or replace to the original user, the parts that prove defective in materials and workmanship. Pentair Myers reserves the right to change or improve its products or any portions thereof without being obligated to provide such a change or improvement for prior sold and/or shipped units.

Seals, piston cups, packing, plungers, liners and valves used for handling clear, fresh, nonaerated water at a temperature not exceeding 120°F are warranted for ninety days from date of shipment. All other applications are subject to a thirty day warranty. Accessories such as motors, engines and auxiliary equipment are warranted by the respective manufacturer and are excluded in this standard warranty. Under no circumstance will Pentair Myers be responsible for the cost of field labor, travel expenses, rented equipment, removal/reinstallation costs or freight expenses to and from the factory or an authorized Pentair Myers service facility.

This limited warranty will not apply: (a) to defects or malfunctions resulting from failure to properly install, operate or maintain the unit in accordance with the printed instructions provided; (b) to failures resulting from abuse, accident or negligence; (c) to normal maintenance services and parts used in connection with such service; (d) to units that are not installed in accordance with applicable local codes, ordinances and good trade practices; (e) if the unit is moved from its original installation location; (f) if unit is used for purposes other than for what it is designed and manufactured; (g) to any unit that has been repaired or altered by anyone other than Pentair Myers or an authorized Pentair Myers service provider; (h) to any unit that has been repaired using non factory specified/OEM parts.

Warranty Exclusions: PENTAIR MYERS MAKES NO EXPRESS OR IMPLIED WARRANTIES THAT EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. PENTAIR MYERS SPECIFICALLY DISCLAIMS THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR ANY PARTICULAR PURPOSE.

Liability Limitation: IN NO EVENT SHALL PENTAIR MYERS BE LIABLE OR RESPONSIBLE FOR CONSEQUENTIAL, INCIDENTAL OR SPECIAL DAMAGES RESULTING FROM OR RELATED IN ANY MANNER TO ANY PENTAIR MYERS PRODUCT OR PARTS THEREOF. PERSONAL INJURY AND/OR PROPERTY DAMAGE MAY RESULT FROM IMPROPER INSTALLATION. PENTAIR MYERS DISCLAIMS ALL LIABILITY, INCLUDING LIABILITY UNDER THIS WARRANTY, FOR IMPROPER INSTALLATION. PENTAIR MYERS RECOMMENDS INSTALLATION BY PROFESSIONALS.

Some states do not permit some or all of the above warranty limitations or the exclusion or limitation of incidental or consequential damages and therefore such limitations may not apply to you. No warranties or representations at any time made by any representatives of Pentair Myers shall vary or expand the provision hereof.



MYERS®
MYERS® APLEX SERIES

1101 MYERS PARKWAY
ASHLAND, OHIO, USA 44805
419-289-1144

WWW.FEMYERS.COM

Warranty Rev. 12/13

BUCKHORN PUMPS, INC.